



SitePro

PRODUCT CATALOG
EDITION XII

TOOLS AND ACCESSORIES

FOR SURVEYING & CONSTRUCTION



BUILT FOR THE FIELD, BUILT FOR YOU.

David White

GAMMON REEL

SITEGEAR

**SALAMANDER
SERIES**

2025 NEW PRODUCTS



17- MECHANICAL PENCILS
P. 41



03-ADP303 DUAL PRISM
P. 14



03-LPR122
P. 15


09-GLS5818 POLE
P. 21



09-114-01 MOUNT
P. 23



09-PSW4000 SHOE/POINT
P. 22

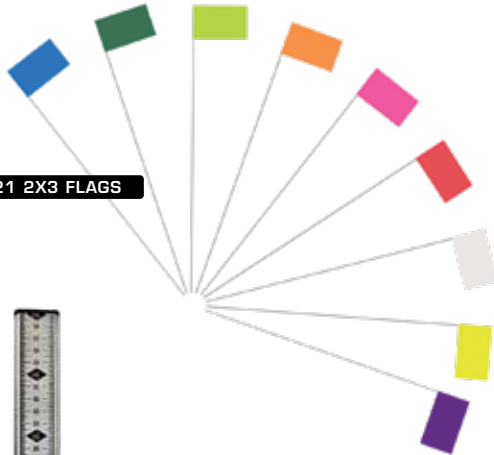


19-F2321 2X3 FLAGS
P. 43



11-807-M
P. 34



19-SBT B/W TWINE
P. 44



11-SCR20
P. 33

PATENT PENDING



09-CF1730 TRIPOD
P. 22



09-TD5610 DOLLY
P. 22



SitePro

Dave White's SitePro™ brings an unparalleled expertise to developing and providing product solutions for the survey, building, and construction markets. SitePro tools and accessories are built to survive the toughest jobsites and are packed with features to help increase your productivity and performance.

BUILT FOR THE FIELD, BUILT FOR YOU

Our brands are well-known leaders in measuring tools, work gear and wide range of accessories – including Gammon Reel®, David White®, SITEGEAR®, SitePro™, and the Salamander® brand of marking products.

SitePro has a comprehensive range of quality products to fit your needs and we are committed to value, quality and excellence in customer service.

CONTENTS

OPTICAL INSTRUMENTS	4
LASER TOOLS & ACCESSORIES	7
DIGITAL LEVELS	11
PRISM SYSTEMS	12
TRIBRACH SYSTEMS	16
PRISM POLE SYSTEMS, RANGE POLES	17
GNSS ROVER RODS	20
GPS & SCANNING SYSTEMS	21
ACCESSORIES FOR GNSS, RODS	23
ACCESSORIES-PRISM, POLE, BIPOD	24
BIPODS	25
TRIPODS FOR INSTRUMENTS	27
LEVELING RODS	32
MEASURING DEVICES	35
MAGNETIC LOCATOR	37
HAND TOOLS	38
FIELD SUPPLIES	40
SHEATHS & POUCHES	45
BAGS AND CASES	46
SAFETY GEAR	48
WORK GEAR	49

SITEPRO BRANDS

GAMMON REEL®

GAMMON REEL®, founded in 1962, provides line reels for both surveying and construction, as well as the GAMMAGNET® magnetic case for steel beam construction. GAMMON REEL is a well-known and respected brand in the surveying and construction industry.

David White®

David White®, founded in 1895 (Milwaukee, Wisconsin), provides productivity tools for leveling, layout and measuring in the construction and surveying industries. The David White brand is offered exclusively by Dave White's SitePro.

SITEGEAR®

The SITEGEAR® brand is focused on providing best-in-class solutions for professionals in the construction and industrial market with workgear that works.



The SALAMANDER® brand is focused on providing professionals in the construction and industrial market with all-environment, high-visibility products.

SITEPRO GUARANTEE

Dave White's SitePro guarantees all our brands of tools and instruments against any defects in material or workmanship with a limited lifetime warranty.

For details and complete warranty, visit www.dwsitepro.com/guarantee/

VISIT OUR WEBSITE

For more information about SitePro and our products visit www.dwsitepro.com

Scan QR Code to view our product catalog online.





APPLICATIONS

- Measuring angles, establishing 90° reference lines
- Determining difference in elevation
- Checking angles, alignment, and plumb
- Basic grade work and short range leveling
- Anchor bolt alignment
- Setting out curves
- Gravity flow pipe laser setup
- Aligning forms, walls



DT8-05

DIGITAL TRANSIT THEODOLITE

The DT8-Series digital transit theodolite provides accurate measurements for a wide range of construction and survey applications.

- Simple, push-button function gives the user precise LCD digital readouts
- Incremental encoding detection system
- Front and back digital displays
- Coaxial tangent and clamp screws for sighting and alignment
- Automatic power shut-off
- Built-in, easy access battery pack
- Water-resistant, sealed construction



sku	what's included
LASER PLUMMET 46-D8896	DT8-05LP theodolites, lens cap, tool kit, rain cover, plumb bob, carrying case, rechargeable battery kit, alkaline battery tray, user guide
LASER SIGHT W/OPTICAL PLUMMET 46-D8897	DT8-05LS theodolites, lens cap, tool kit, rain cover, plumb bob, carrying case, rechargeable battery kit, alkaline battery tray, user guide
Magnification	30x
Field of View	1° 30'
Centering Plummet	635nm laser, 2M
Reading System	Advanced absolute encoder
Angular Precision	5" (1 mgon)
Minimum Reading	1" / 5" switchable
Units	deg / mil / gon / V %
Tilt Sensor	Automatic compensation, ± 3' range

46-DT8EP

DIAGONAL EYEPIECE

- Easily mounts to unit to measure angles and points in any direction
- Provides an erect image, and 1° 30' angle of view
- Measure any target with a distance of at least 4-1/4-ft (1.3m) from the instrument



*Available Separately

APPLICATIONS

- Gravity flow pipe laser setup
- Measuring angles, establishing 90° reference lines
- Anchor bolt alignment
- Aligning forms, walls



LT8-300LTU

UNIVERSAL LINE TRANSFER UNIT

The LT8-300LTU is versatile and ideal for use with a pipe aligning laser or as a level-transit. The 360° telescope design allows direct sight below the instrument for pipe-laying applications.

- Powerful 26X optics
- Accuracy: ±3/16-in at 150-ft (4.75mm at 45m)
- Range up to 400-ft (120m)
- Horizontal circle with lock
- Glass reticle with stadia lines for measuring distance (ratio 1:100)
- Plate vial for rough leveling and general plummetering requirements

sku	what's included
NO PLUMMET 46-D8877	LT8-300LTU line transfer unit, rain hood, objective lens cap, case, user guide
LASER PLUMMET 46-D8879	LT8-300LTULP line transfer unit, rain hood, objective lens cap, case, user guide



APPLICATIONS

- Medium range leveling
- Turning angles, establishing 90° reference lines
- Determining vertical angles, basic grade work
- Checking angles, alignment, and plumb
- Anchor bolt alignment
- Gravity flow pipe laser setup
- Aligning forms, walls



LT8-300

UNIVERSAL LEVEL-TRANSIT

The David White LT8-300 is rugged and dependable, making this five-minute instrument the first choice for practically every horizontal and vertical sighting application in construction.

- Powerful 26X optics
- Accuracy: ±3/16-in at 150-ft (4.75mm at 45m)
- Range up to 400-ft (120m)
- Vertical arc and horizontal circle with locks and tangents
- 1:100 stadia with glass reticle

sku	what's included
OPTICAL PLUMMET 46-D8871	LT8-300P level-transit, plumb bob, rain hood, objective lens cap, case, user guide
LASER PLUMMET 46-D8872	LT8-300LP level-transit, plumb bob, rain hood, objective lens cap, case, user guide



David White Optical Instruments are guaranteed with a two (2) year limited warranty. Unless otherwise specified, hand levels and accessory items include a 90-day limited warranty.

▲ Laser products are manufactured to Class 2M or 3R laser classification. Please refer to product warning labels for actual laser output and classification.

APPLICATIONS

- Turning horizontal angles, establishing 90° reference lines
- Medium range leveling
- Checking angles, alignment
- Determining difference in elevation
- Leveling forms and footers
- Measuring cut-and-fill



APPLICATIONS

- Short-range leveling
- Turning angles, establishing 90° reference lines
- Determining vertical angles, basic grade work
- Checking angles, alignment, and plumb



APPLICATIONS

- Short-range leveling
- Turning angles, establishing 90° reference lines
- Checking points in same horizontal plane
- Checking elevations



David White Optical Instruments are guaranteed with a two (2) year limited warranty. Unless otherwise specified, hand levels and accessory items include a 90-day limited warranty.

AL8-SERIES

AUTOMATIC LEVELS

Make every leveling job faster and easier with David White automatic levels. Superior design, sighting scope, and bubble vial are built into the housing for greater durability.

- Lock-out device protects compensator during transport
- Larger aperture allows more light for a sharper image
- Soft control knobs provide an easier grip
- D8932-model features wedge hairs for improved reading accuracy
- Infinite tangent screw
- Horizontal circle with white-on-black graduations
- Wire-hung, magnetically damped compensator holds the level line of sight within ±15 arc minutes of level



sku	what's included	Magnification	Leveling Accuracy	Working Range
STANDARD KIT 45-D8926	AL8-26 automatic level, adjustment tools, lens cap, plumb bob, case, user guide	26X	±1/16-in @ 100-ft (±1.5mm @ 30m)	300-ft (90m)
COMPLETE KIT 45-D8926K-1¹	AL8-26 automatic level, adjustment tools, lens cap, plumb bob, case, user guide, tripod, leveling rod	26X	±1/16-in @ 100-ft (±1.5mm @ 30m)	300-ft (90m)
STANDARD KIT 45-D8932	AL8-32 automatic level, adjustment tools, lens cap, plumb bob, case, user guide	32x	±1/32-in @ 100-ft (±1.0mm @ 30m)	400-ft (120 m)
COMPLETE KIT 45-D8932K-1¹	AL8-32 automatic level, adjustment tools, lens cap, plumb bob, case, user guide, tripod, leveling rod	32x	±1/32-in @ 100-ft (±1.0mm @ 30m)	400-ft (120 m)

LT6-900

22X MERIDIAN LEVEL-TRANSIT

- Ideal for light construction work including leveling, turning angles, and determining vertical angles
- ±1/4-in at 100-ft (6mm at 30m) accuracy
- Crosshairs with 1:100 stadia lines allow you to determine the distance
- Up to 200-ft (60m) range
- Horizontal circle graduated to 1°, reads by vernier directly to 15-minutes
- Vertical arc reads in degrees (0-45°)
- Horizontal lock and tangent screw provide precise movement control
- Built-in sunshade for clearer sightings
- Top-mount leveling vial



sku	what's included
STANDARD KIT 44-D8834	LT6-900 transit-level, plumb bob, case, user guide
COMPLETE KIT 44-D8834K-1¹	LT6-900 transit-level, plumb bob, case, tripod, leveling rod , user guide

L6-20

22X MERIDIAN LEVEL

- Designed for light construction work such as leveling and turning angles.
- ±1/4-in at 100-ft (6mm at 30m) accuracy
- Crosshairs with 1:100 stadia lines allow you to determine the distance of the transit from the level rod
- Up to 200-ft (60m) range
- Horizontal circle graduated to 1°, reads by vernier direct to 15-minutes
- Top-mount leveling vial
- Horizontal lock and tangent screw provide precise movement control
- Built-in sunshade for clearer sightings



sku	what's included
STANDARD KIT 44-D8824	L6-20 level, plumb bob, case, user guide
COMPLETE KIT 44-D8824K-1¹	L6-20 level, plumb bob, case, tripod, leveling rod , user guide

¹ Complete kits available: include aluminum tripod and aluminum rod. Specify leveling rod graduations when ordering, add **C** for 8ths, **T** for 10ths. Example: 44-D8834-1T would include the 10ths leveling rod.

43-D620

2X SIGHTING HAND LEVEL

- Ideal for preliminary survey and simple distance estimation
- Sturdy impact-resistant aluminum body and easy-to-read protected vial
- 2-power fixed magnification
- Pocket clip
- 90-day warranty





APPLICATIONS

- Measuring angles, establishing 90° reference lines
- Determining difference in elevation
- Checking angles, alignment, and plumb
- Basic grade work
- Short-range leveling
- Anchor bolt alignment
- Setting out curves
- Gravity flow pipe laser setup
- Aligning forms and walls



DT-205


5-SEC DIGITAL THEODOLITE

The SitePro DT-205 digital theodolite provides accurate measurements for a wide range of construction and survey applications.

- Simple, push-button functions give the user precise LCD digital readouts
- Incremental encoding detection system
- Front and back digital displays
- Optical plummet - 3X power
- Coaxial tangent and clamp screws for sighting and alignment
- Automatic power shut-off
- Built-in, easy access battery pack
- Water-resistant, sealed construction

sku	what's included
STANDARD KIT 26-DT205	DT-205 Theodolite, lens cap, tool kit, rain cover, plumb bob, carrying case, rechargeable battery kit, alkaline battery tray, user guide

DT-205	
Magnification	30x
Field of View	1° 30'
Centering Plummet	3x optical
Reading System	Advanced absolute encoder
Angular Precision	5" (1 mgon)
Minimum Reading	1" / 5" switchable
Units	deg / mil / gon / V %
Tilt Sensor	Automatic compensation, ± 3° range

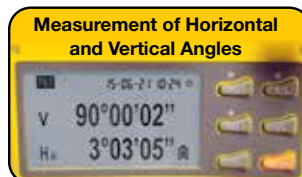

46-DT8EP

DIAGONAL EYEPIECE



*Available Separately



APPLICATIONS

- Turning horizontal angles, establishing 90° reference lines
- Medium-range leveling
- Checking angles, alignment
- Determining difference in elevation
- Leveling forms and footers
- Measuring cut-and-fill



SK-SERIES

PRO AUTOMATIC LEVEL

This SitePro SK-Series professional automatic level features superior optics and excellent magnification. Includes a large aperture that allows more light for a sharper image.

- Magnetically damped compensator quickly levels and stabilizes line of sight
- Crosshairs with 1:100 stadia lines
- Fine-motion horizontal tangent knobs on left and right sides
- Solid base with three leveling screws
- 360° graduated horizontal circle in 1° increments
- Circular bubble vial can be easily viewed with 90° mirror
- Weather-resistant IP54

sku	what's included	magnification	accuracy	range	field of view	compensator range	wgt
STANDARD KIT 25-SK32X	SK32X automatic level, adjustment tools, lens cap, plumb bob, case, user guide	32X	±1/16-in @ 250-ft (±1.5mm @ 76m)	400-ft (120m)	1° 20'	±0.3-in, +/-15-ft	3.65lb (1.6kg)
STANDARD KIT 25-SK28X	SK28X automatic level, adjustment tools, lens cap, plumb bob, case, user guide	28X	±1/16-in @ 200-ft (±1.5mm @ 60m)	350-ft (105m)	1° 20'	±0.4-in, +/-15-ft	3.65lb (1.6kg)
STANDARD KIT 25-SK24X	SK24X automatic level, adjustment tools, lens cap, plumb bob, case, user guide	24X	±1/16-in @ 150-ft (±1.5mm @ 46m)	300-ft (90m)	1° 25'	±0.5-in, +/-15-ft	3.65lb (1.6kg)



APPLICATIONS

- Short-range leveling
- Turning angles, establishing 90° reference lines
- Determining vertical angles, basic grade work
- Checking angles, alignment, and plumb



TL20X

20-POWER TRANSIT LEVEL

- The TL20X transit level is ideal for leveling and vertical applications
- Fast setup, simple to use
- Clamps and tangents quickly bring your instrument on target
- 3-screw leveling base with 5/8-11 thread for tripod
- Built-in sunshade with rubber eyepiece
- 15-minute horizontal circle
- Stadia lines

sku	what's included	magnification	accuracy	range	field of view	wgt
STANDARD KIT 25-TL20X	TL20X transit level, plumb bob, adjustment tools, case, user guide	20X	±1/4-in at 100-ft (6mm @ 30m)	200-ft (60m)	±2"/100-ft (±0.6m/30m)	2.95lb (1.3kg)



Dave White's SitePro Optical Instruments are guaranteed with a two (2) year limited warranty. Unless otherwise specified, accessory items include a 90-day limited warranty.

APPLICATIONS

- Short to mid-range leveling for building and construction
- Elevation control
- Building and civil engineering
- Stakeout



11-805-BM barcode leveling rod is compatible with the SDL32



SDL 32

FOCUS, MEASURE, DISPLAY RESULTS

32-POWER DIGITAL AUTO LEVEL

Super-fast measurement speed of less than 3 seconds, with the simplicity of one-push measure and store functionality, providing a faster, more economical workflow.

- One-button measuring: accuracy of $\pm 1.0\text{mm}$ for 1km double-run level. Simply press a button to take the measurement
- Range up to 100m (330-ft)
- Built-in memory for storing up to 1,000 points
- On-board software displays and calculates results for applications such as Line Leveling, Delta Height, and Cut & Fill
- Interfaces with micro-USB and outputs to a computer
- Data can be recorded on the job site and easily downloaded by connecting the SDL32 to a PC or laptop
- Shock-resistant pendulum magnetic damped compensator ensures durability and precision
- IP55 water protection
- Horizontal circle graduated to 1°



sku	what's included	magnification	accuracy	range	field of view	compensator	wgt
STANDARD KIT 25-SDL32	SDL 32 Digital Level, 5m barcode leveling rod, micro-USB cable, software, protective hard shell carrying case, user manual	32X	$D \leq 10\text{m} = < \pm 10\text{mm}$; $D > 50\text{m} = < \pm 0.2\%$ D	330-ft (100m)	$1^\circ 20'$	Range: $\pm 0.3\text{-in}$, +/-15-ft	4.2 lb (1.9kg)

APPLICATIONS

- Adjusting and checking elevations
- General construction leveling such as concrete forms and footers
- Vertical alignment and plumb such as form alignment
- Dual-grading and excavating
- Commercial and residential construction such as leveling & aligning walls, installing ceilings & floors



*Detector may be different than shown.

RL 322GR

DUAL-GRADE ROTARY LASER WITH VERTICAL ALIGNMENT

- Electronic self-leveling accuracy up to $3/32\text{-in}$ at 100-ft (2.4mm at 30m)
- Working range up to 2,400-ft (730m)
- Ideal for both indoor and outdoor applications
- -7% to +7% in both X and Y axis dial-in grade (single slope: $\pm 10.00\%$)
- Illuminated display for precise level, grade, and vertical alignment
- 90° layout beams, variable speed, scan angles, and beam positioning
- Smart H.I. Alert System stops rotation and alerts user when laser has been disturbed or drifts

sku	what's included
STANDARD KIT 27-RL322GR	RL 322GR Laser, RD 302 Detector, rechargeable NiMH battery pack, alkaline battery pack, remote, target, glasses, carrying case, user guide



Laser products are manufactured to Class 2M or 3R laser classification. Please refer to product warning labels for actual laser output and classification.



Choosing The Right Rotary Laser.



	KS SERIES ROTARY LASERS			PRO SERIES ROTARY LASER
	KS 100H	KS 100HV	KS 100HVG	RL 322GR
Leveling Accuracy	$\pm 1/8\text{-in}$ ($\pm 3\text{mm}$)	$\pm 1/8\text{-in}$ ($\pm 3\text{mm}$)	$\pm 1/8\text{-in}$ ($\pm 3\text{mm}$)	$\pm 3/32\text{-in}$ ($\pm 2.4\text{mm}$)
Leveling Type	Electronic, $\pm 5^\circ$	Electronic, $\pm 5^\circ$	Electronic, $\pm 5^\circ$	Electronic, $\pm 5^\circ$
Working Range (dia.)				
without Detector	---	---	295-ft (90m)	65-ft (20m)
with Detector	1,000-ft (305m)	1,000-ft (305m)	1,000-ft (305m)	2,400-ft (730m)
Functions				
Slope/Grade	Dual Slope, -8.0%, +8.0%	Dual Slope, -8.0%, +8.0%	Dual Slope, -8.0%, +8.0%	Dual Dial-In, -10.0%, +10.0%
Scanning	---	Preset: 0° , 15° , 45° , 90°	Preset: 0° , 15° , 45° , 90°	Preset: 0° , 10° , 45° , 90° , 180°
Height Alert	Yes	Yes	Yes	Yes
Rotation speed(s)	600 rpm	150, 300, 600 rpm	150, 300, 600 rpm	60, 120, 300, 600 rpm
Power Supply	4-C Alkaline	4-C Alkaline	4-C Alkaline, NiMH Battery	4-C Alkaline & NiMH Battery
Environment	IP54, Water/Dust Resistant	IP54, Water/Dust Resistant	IP54, Water/Dust Resistant	IP65, Waterproof

APPLICATIONS

- Leveling, checking elevations, concrete forms
- Installation of decks, pools, drop ceilings, floors
- Excavating, digging footings, septic systems



KS 100H

BASIC HORIZONTAL ROTARY LASER

Keep it simple with the KS 100H horizontal electronic self-leveling rotary laser for precise leveling applications.

- **Ideal for outdoor use**
- Simple button operation, easy to use
- $\pm 1/8$ -in at 100-ft (3.0mm at 30m) leveling accuracy
- Up to 1000-ft (305m) working range
- Electronic self-leveling
- Dual axis slope ($\pm 8\%$) for simple slope applications
- Anti-drift system alerts user when laser has been disturbed or drifts
- Enclosed rotor housing keeps laser safe from tough jobsite conditions

sku	what's included
STANDARD KIT 27-KS100H	KS 100H rotary laser, detector with bracket, alkaline battery compartment and batteries, case, user guide
COMPLETE KIT 27-KS100HK-4¹	KS 100H rotary laser, detector with bracket, tripod, leveling rod , alkaline battery compartment and batteries, case, user guide



APPLICATIONS

- Leveling, checking elevations, concrete forms, footings, foundations
- Estimating cut and fill
- Manual slope
- Installation of decks, pools, drop ceilings, floors
- Excavating, digging footings, septic systems



KS 100HV

HORIZONTAL/VERTICAL ROTARY LASER

- **Ideal for indoor and outdoor use**
- Horizontal and vertical electronic $\pm 4^\circ$ self-leveling
- Simple button operation, easy to use
- $\pm 1/8$ -in at 100-ft (3.0mm at 30m) leveling accuracy
- Up to 1000-ft (305m) working range
- Dual axis slope ($\pm 8\%$) for simple slope applications
- Anti-drift system alerts user when laser has been disturbed or drifts
- Enclosed rotor housing keeps laser safe from tough jobsite conditions

sku	what's included
STANDARD KIT 27-KS100HV	KS 100HV rotary laser, laser detector with bracket, remote, universal mount, magnetic target, glasses, 4-'C' alkaline batteries, carrying case, user guide
COMPLETE KIT 27-KS100HVK-4¹	KS 100HV rotary laser, laser detector with bracket, remote, universal mount, magnetic target, glasses, 4-'C' alkaline batteries, carrying case, tripod, leveling rod , user guide



APPLICATIONS

- Leveling, checking elevations, concrete forms, footings, foundations
- Installing cabinets and finish carpentry
- Manual slope work
- Installation of decks, pools, drop ceilings, floors
- Excavating, digging footings, septic systems



KS 100HVG

HORIZONTAL/VERTICAL GREEN ROTARY LASER

- **Ideal for indoor and outdoor use**
- Horizontal and vertical electronic $\pm 4^\circ$ self-leveling
- **4X** brighter and more visible than red beam lasers
- Simple button operation, easy to use
- $\pm 1/8$ -in at 100-ft (3.0mm at 30m) leveling accuracy
- Up to 1000-ft (305m) working range
- Dual axis slope ($\pm 8\%$) for simple slope applications
- Anti-drift system alerts user when laser has been disturbed or drifts
- Enclosed rotor housing keeps laser safe from tough jobsite conditions

sku	what's included
STANDARD KIT 27-KS100HVG	KS 100HVG rotary laser, laser detector with bracket, remote universal mount, magnetic target, glasses, NIMH rechargeable battery pack w/charger, alkaline batteries, carrying case, user guide
COMPLETE KIT 27-KS100HVGK-4¹	KS 100HVG rotary laser, laser detector with bracket, remote, universal mount, magnetic target, glasses, NIMH rechargeable battery pack w/charger, alkaline batteries, carrying case, tripod, leveling rod , user guide



Laser products are manufactured to Class 2M or 3R laser classification. Please refer to product warning labels for actual laser output and classification.

Dave White's SitePro KS-Series Rotary Lasers are guaranteed with a one (1) year limited warranty. Unless otherwise specified, accessory items include a 90-day limited warranty.

¹ Complete kits available: include aluminum tripod and aluminum rod. Specify leveling rod graduations when ordering, add **C** for 6ths, **T** for 10ths. Example: 27-KS100H-4C would include the 6ths leveling rod.

APPLICATIONS

- 360° versatile layout
- One person leveling
- Plumb applications
- Point transfer
- Alignment



KS32LP-G

360° HYBRID GREEN BEAM LASER

The KS-Series 360° Hybrid Laser is a high-visibility green beam laser instrument ideal for one person leveling, plumb, layout, and squaring. Simple to use with a one-button operation. Small, compact design with easy-to-access battery compartment for rechargeable Lithium-ion battery pack.

- $\pm 1/8$ -in at 30-ft (3mm at 10m) leveling accuracy
- Up to 100-ft (30m) working diameter range
- Self-Leveling up to $\pm 3.5^\circ$
- Rechargeable Lithium-ion battery set with easy access battery compartment
- Detector mode allows laser to be used with optional green beam line laser detector


sku

28-KS32LP-G

what's included

KS32LP-G laser, multipurpose mount, clip attachment, 7.4 Lithium-ion battery, charger block and cable (# 28-LI74VBATPK), target, hard case, user guide

GREEN BEAM LASER
4X BRIGHTER
THAN RED BEAM LASER

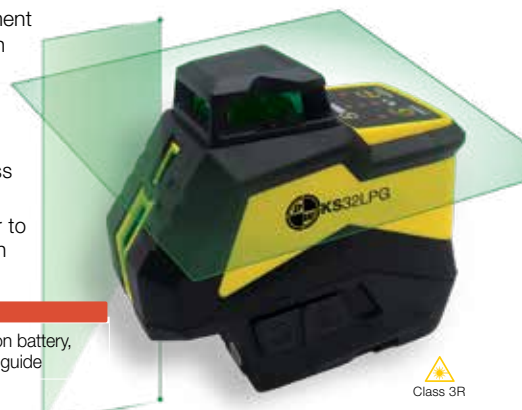

Class 3R

APPLICATIONS

- Level, horizontal & vertical layout, square, & plumb
- Layout, alignment, and squaring of interior walls
- Drop ceiling or acoustical ceiling installation
- Installation of recessed lighting, ductwork, plumbing
- Cabinets & finish carpentry



KS2L-G

CROSS LINE GREEN BEAM LASER

The KS-Series Cross Line laser projects a high-visibility, green vertical and horizontal laser line, ideal for one person leveling, plumb, and layout applications. Small, compact design with easy-to-access battery compartment.


- $\pm 1/8$ -in at 30-ft (2mm at 10m) leveling accuracy
- 4 times brighter than red beam lasers for better visibility
- Up to 100-ft (30m) working range
- Self-Leveling up to $\pm 3^\circ$
- Powered by 4-AA Alkaline batteries with easy access battery compartment

sku

28-KS2L-G

what's included

KS2L-G laser, multipurpose mount, clip attachment, target, batteries, hard case, user guide

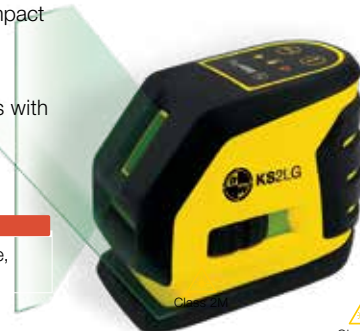

Class 3R

APPLICATIONS

- Level, 90° layout, square, and plumb
- Layout and squaring interior walls and drywall track
- Point transfer
- Cabinet installation and finish carpentry



KS5P-G

5-POINT GREEN BEAM LASER

The KS-Series 5-point laser projects five, 90°, high-visibility, green beam points for a wide range of applications. Ideal for one person leveling, plumb, layout and squaring. Simple to use with a one-button operation. Small, compact design with easy-to-access battery compartment.

- $\pm 1/8$ -in at 30-ft (3mm at 10m) leveling accuracy
- Up to 100-ft (30m) working range
- Bright, highly focused green laser points
- Self-leveling spot beams up to $\pm 3.5^\circ$
- Powered by 2-AA Alkaline batteries with easy access battery compartment
- Includes UM1P multi-mounting device for quick positioning of the laser beams

sku

28-KS5P-G

what's included

KS5P-G laser, multipurpose mount, target, batteries, hard case, user guide



Class 3R



KS-Series Layout Lasers are guaranteed with a one (1) year limited warranty. Accessory items include a 90-day limited warranty.



Laser products are manufactured to Class 2M or 3R laser classification. Please refer to product warning labels for actual laser output and classification.

RD105 COMPACT PRO LASER DETECTOR

- Front and rear LCD displays allow fast and easy visual detection of laser beam for exterior applications
- Automatic shut-off after 20-minutes without use
- Fine and coarse (2mm | 5mm at 50m) on-grade sensitivity settings for easy grade detection
- Strong built-in magnets on side and top
- Rugged housing and gasket seal (IP54)

sku	what's included	use with:
27-RD105	RD 105, rod clamp (#27-RB202), 4 AAA alkaline batteries	Most Red Beam Rotary Lasers
27-RD105G	RD 105G, rod clamp (#27-RB202), 4 AAA alkaline batteries	Most Green Beam Rotary Lasers



Back View

RD302 LASER DETECTOR WITH DIGITAL READOUT

- Ideal for basic and advanced leveling and alignment
- Digital readout displays elevation from on-grade within ± 2 -in (± 50 cm)
- Large 5-in (127mm) capture height allows quick detection
- Units of measure: mm or inches
- Simultaneous elevation LED indicators on front for fast, easy visual reference
- Rugged housing and gasket sealed for water and dust protection (IP55)
- Strong built-in magnets on side and top
- Automatic shut-off

sku	what's included	use with:
27-RD302	RD 302, rod clamp (#27-RB202), 9v battery	Most Red Beam Rotary Lasers




Back View

Dave White's SitePro Laser Detectors are guaranteed with a one (1) year limited warranty.

27-BBMOUNT BEAM MOUNT CLAMPING SYSTEM

- Ideal for setting up instruments for vertical alignment applications
- Securely attaches instrument to beam or joist up to 2.17-in (55mm)
- Removable 5/8-11 mounting plate easily fastens to instrument
- Fastener hole to ensure position of a theodolite's axis is precisely over point
- Weighs 2.43lb (1.10kg)

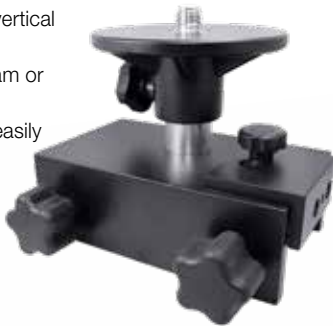

27-MT4 UNIVERSAL MULTI-MOUNT

- Ideal for drop ceilings, remodeling, and masonry
- Quick-release push-button
- Graduated scale (± 2 -in and ± 50 mm markings) with 1/8-in and millimeter markings, plus fine adjustment knob to precisely align the laser to the target
- Key slot for mounting to a stud or wall using nail or screw
- Weighs 3.0lb (1.4kg)



BATTERY PACKS AND CHARGERS



46-DT805-CHARGER



27-LR4LIBATPK

sku	designed for
27-LR4LIBATPK	Li-ION Battery/Charger Kit for LR-Series Rotary
27-SLRCHARGER	Charger Kit for KS-Series, LR322GR Rotary Laser
27-SLRNIMHKIT	NiMH Battery Pack/Charger Kit for KS 100 Series
28-LI74VBATPK	Li-Ion Battery/Charger Kit for KS32LP-G
46-DT805-CHARGER	Battery Charger for DT8-05, DT-205 Theodolite
46-DT8BAT-NIMH	NiMH Battery Pack for DT8-05 and DT-205 Theodolite
46-DT8-BB	Battery Box for DT8-05 and DT-205 Theodolite

INSTRUMENT CASES PADDED STORAGE CASES

- For your SitePro and David White precision measuring instruments
- Durable outer shell and heavy-duty protective padding




sku	designed for
25-SPCASE-XP	Hard Shell Padded Case for SK AutoLevel Series
25-TL20X-CASE	Hard Shell Case for TL20X, LT6-900 Transit
27-LR4CASE	Hard Shell Padded Case for LR4 Rotary Laser Series
44-D8824-CASE	Hard Shell Case for L6-20 Level
46-DT8CASE	Hard Shell Padded Case for DT-205 and DT8-05 Theodolite

27-4852-16

HEAVY-DUTY COLUMN CLAMP

- 12-in (30.48cm) adjustable vertical column with 6-in (15cm) flat platform, 5/8-11 threaded stud
- Rubber bumper for hand and finger protection
- Heavy-duty ratchet with 10-ft (3.05m) by 1-7/8-in (47mm) strap with load rating of 2,200lb (1,000kg)
- Center line of the 5/8-11 stud to column measures 15-in (38.1cm)
- Constructed of structural aluminum for industrial applications and stainless steel hardware
- Weighs 13.8lb (6.25kg)

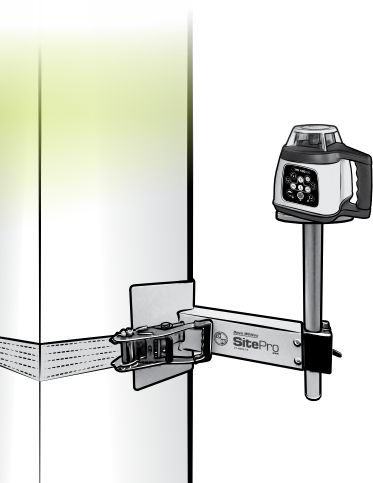

KS SERIES KEEP IT SIMPLE

**DIGITAL
LEVELS**


DL-SERIES

DIGITAL LEVEL

- Precise digital measurements displayed in degrees, percent, or inches/feet
- Absolute and relative angle measurement
- High-visibility LCD back-lit display with audible level and plumb indicator
- Reference function sets any slope to 0.0°
- Digital measurement readout flips when upside down for ease of use
- Lightweight, rugged, precision-machined aluminum construction
- Quick horizontal and vertical calibration
- Hold function locks measurement readout
- Includes Digital level, AAA batteries, nylon padded case with carry strap, user guide



Padded Carrying Case is included with the Digital Level



LCD BACK-LIT DISPLAY

with audible sound. Display readout rotates when measuring overhead

DIGITAL LEVELS

	29-DL24	29-DL48
Length (Approx.)	24-in (62cm)	48-in (120cm)
Measuring Range	0-360° (4 x 90°)	
Measuring Accuracy	0° and 90°, ±0.1°; -1° to 89°, ±0.2°-in	
Weight	1.34lb (610g)	2.65lb (1200g)
Dimensions	23.7 x 2.6 x 1.2-in (62 x 6.6 x 3cm)	47.3 x 2.6 x 1.2-in (120 x 6.6 x 3cm)



Dave White's SitePro DL-Series Digital Levels are guaranteed with a one (1) year limited warranty. Unless otherwise specified, accessory items include a 90-day limited warranty.



9300N

0/-30MM TILTING NITROGEN-FILLED PRISM SYSTEM

The advanced SitePro 9300 nitrogen (N₂) sealed 0/-30mm prism system features a single tilting assembly with front lever locking mechanism to secure in position. This high-performance prism system, precisely positioned in a high-grade aluminum holder, ensures accurate measurement and is ideal for surveying.

- 62mm precision-ground glass, with up to 2 arc second accuracy
- Nitrogen sealed prism canister prevents condensation on glass lens
- Height of the prism in the holder is 100mm
- Front lever locking mechanism to secure prism in position
- 0/-30mm offset constant
- Dual-sided aluminum target 6.9-in x 5.5-in (17.6cm x 14cm)
- 5/8-11 stainless steel bayonet adapter (female thread)
- Includes prism, target and holder assembly

sku	offset	prism type	prism size	target color	accuracy	axis height
03-9300N-O	0 / -30mm	nitrogen-filled	62mm	Flo-orange w/white	≤2 sec	100mm



1010-SERIES

0/-30MM SINGLE TILTING PRISM SYSTEM

The SitePro 1010-series tilting single prism system features a weather-proof sealed 2-1/2-in prism, all-metal holder and 5.5 x 7-in (14 x 17.8cm) target.

- 0/-30mm constant prism system, up to 5 second accuracy
- Weatherproof-sealed 62mm precision glass prism
- Stainless steel tension knob to easily adjust target
- M20 x 2 mount thread, 5/8-11 bayonet adapter
- Includes prism, target and holder assembly, protective cap, padded case (#21-1010)


sku	offset	prism type	prism size	target color	accuracy	axis height
03-1010-CC	0 / -30mm	copper-coated	62mm	Flo-orange w/black	≤5 sec	100mm
03-1010-FC	0 / -30mm	copper-coated	62mm	Flo-lime w/black	≤5 sec	100mm
03-1010-O	0 / -30mm	standard	62mm	Flo-orange w/black	≤5 sec	100mm
03-1010-Y	0 / -30mm	standard	62mm	Yellow w/black	≤5 sec	100mm



03-1010-CC



21-1010



2010M-SERIES

SINGLE TILT PRISM SYSTEM, POLYCARBONATE

The SitePro 2010M-series single tilting 0/-30mm prism system is an affordable, high-quality prism.

- 62mm precision ground glass, up to 2 arc second accuracy
- Single-tilting holder tilts to 360° with built-in peep sight for easy setup
- Can be mounted in either 0 or -30mm offset positions
- Height of the prism in holder is 120mm
- Nickel-plated aluminum 5/8-11 bayonet adapter
- Fully compatible with leading manufacturers such as Sokkia, Trimble, Topcon, and other systems
- Prism canister and holder/target molded from durable, lightweight polycarbonate, with metal yoke and nylon washer
- Includes prism, target and holder assembly, protective cap, padded case (#21-2010)

sku	offset	prism type	prism size	target color	accuracy	axis height
03-2010M-O	0 / -30mm	standard	62mm	Flo-orange w/white	≤5 sec	120mm



03-2010M-O



21-2010

PRISM IN CANISTER
0/-30MM PRISMS

- Weather-proof sealed precise prism
- 62mm diameter prism
- M20x2 male mounting thread



sku	dia (mm)	type	color	accuracy	replacement for models
03-2011-FC	62mm	copper-coated	Black	≤ 5-in	1010, 2010M
03-2011-O	62mm	standard	Flo-orange	≤ 5-in	1010, 2010M
03-2011-Y	62mm	standard	Flo-yellow	≤ 5-in	1010, 2010M

TILTING TARGET & HOLDER

These SitePro target and holder assemblies are tilting and ideal for night time or low-light work conditions.



sku	description	color
03-1012-O	Target & holder with rear tension knob	Flo-orange/Black
03-1012-Y	Target & holder with rear tension knob	Flo-yellow w/Black
03-2012M-O	Poly target & metal holder with 360° tilting	Flo-orange/Black

3024
SWISS-STYLE
62MM SWISS-STYLE PRO PRISM SYSTEM WITH LARGE TARGET

- 62mm circular prism system is designed for high accuracy and maximum range
- High precision with less than 2-in beam deviation
- 2.0mm centering accuracy, constant of 0mm
- Range up to 11,500-ft (3,500m)
- Copper coating with special resistant coating to prevent reflectivity caused by small particles or condensation
- Large removable aluminum target
- Includes 3024 prism system, prism cap, padded case

sku	description	color	tilt height	offset
03-3024	62mm Swiss-Style Pro Precision Prism System with Large Target	Black/Flo-green	86mm	Leica Offset: 0 Actual Offset: -34.4


LPR121
SWISS-STYLE
SWISS-STYLE PRO PRISM SYSTEM

- Built-in sight alignment
- High precision with less than 2-in beam deviation, 2.0mm centering accuracy
- Copper coating with special resistant coating to prevent reflectivity caused by small particles
- Range up to 11,500-ft (3,500m)
- Mounted in metal holder with detachable target
- Includes LPR121 prism system, cap, padded case

sku	description	color	tilt height	offset
03-LPR121	Swiss-Style Pro Precision Circular Prism System	Black w/Flo-green side 1, Flo-red side 2	86mm	Leica Offset: 0 Actual Offset: -34.4



03-1518-R
**MINI PRISM STAKEOUT
POLE SYSTEM**

- 25mm precision mini prism with 0/-30mm offset tilting aluminum prism and holder
- Black anodized, sealed aluminum can
- Two on-board circular bubble vials
- Four (4) precision-machined sectional poles
- Includes prism system, four (4) sectional poles, point, adjustment tools, and case
- Weighs 1.7lb (0.77kg)


1500/1600
0/-30MM MINI PRISM SYSTEM

- 25mm prism, black anodized, sealed aluminum can
- 5/8-11 mounting thread
- 40-minute adjustable circular bubble vials
- Includes mini prism, prism holder, plumb bob prism point, S-hook, prism mount, 5/8-11 height extension, carrying case with belt loop



03-1500
Side mounted
on-board vial



03-1600
Center mounted
on-board vial

sku	prism size	prism type	vial	color
03-1500-O	25mm	Standard	Side Mounted	Orange
03-1500-CC	25mm	Copper-coated	Side Mounted	Orange
03-1600-O	25mm	Standard	Center Mounted	Orange


03-1558-RC
**MINI-PRISM WITH
LARGE TARGET**


- All anodized aluminum holder, target and can
- Tilting target, 0/-30mm offset
- 25.4mm copper-coated prism
- 5/8-11 mounting thread
- 40-minute adjustable circular side-mounted vial
- Includes plumb bob prism point w/ hook (#03-1507), bracket (#03-1516), 5/8-11 height extension, case


MINI PRISM ACCESSORIES

sku	description	mount thread
03-1511	25.4mm Prism w/Canister	M6- male
03-1507	Plumb Bob Holder/Point & S-Hook	5/8-11
03-1516	Prism Mount, 0/-30mm Offset	M6- female


RT-SERIES
**REFLECTIVE RETRO ADHESIVE
TARGETS**

- These self-adhesive reflective targets can easily be seen in daylight
- 0 constant standard deviation at shortest target range 10m is less than 1.0mm
- Available in seven (7) different sizes, **Packaged with 10 targets**



sku	contains	qty/pack	range (approx.)	size
03-RT20MM	Package of 20mm Targets	10	50m	20mm x 20mm
03-RT30MM	Package of 30mm Targets	10	80m	30mm x 30mm
03-RT40MM	Package of 40mm Targets	10	100m	40mm x 40mm
03-RT50MM	Package of 50mm Targets	10	110m	50mm x 50mm
03-RT60MM	Package of 60mm Targets	10	120m	60mm x 60mm
03-RT70MM	Package of 70mm Targets	10	130m	70mm x 70mm
03-RT90MM	Package of 90mm Targets	10	140m	90mm x 90mm

03-1700-B
**FIXED L-BAR 25MM
MONITORING PRISM**

- Ideal for surveying locations where a permanent mounting is needed
- 25mm copper-coated prism which is water and dust proof, 0mm offset
- Assembly made of black anodized aluminum, 10.3mm ID mounting hole



03-ADP303
NEW!
62MM ADJUSTABLE DUAL PRISM

- Two 62mm moisture-sealed **silver-coated** prisms for superior accuracy and a padded carrying case
- Compatible with standard 5/8-11 threaded surveying accessories
- Stackable 303 stainless-steel holders allow for the use of additional prisms or attachment of a GNSS receiver on the 5/8-11 top stud for versatile measurements
- Zero prism offset with ± 1 mm precision for highly accurate measurements

sku	contains	wgt
03-ADP303	Two (2) prisms, holder assembly, lens covers, adjustment tool, padded case	3.1lb (1.39kg)
03-ADP303-050	Holder assembly for ADP prisms	1.7lb (0.75kg)
03-1011-BS	62MM Silver-Coated Prism - 5 sec accuracy, Black.	0.62lb (0.28kg)



APPLICATIONS

- Mining
- Tunneling
- Monitoring
- Rail Applications


1360
360° MINI REFLECTOR SYSTEMS


- Compatible with **Leica™ Systems** and offsets
- +30mm constant
- Precise standards, ≤5 sec. accuracy
- Ideal for 360° surveying applications
- Includes 4-section pole set, mount with bubble vial, point, carrying case

sku	constant	accuracy	wgt
03-1360	+30mm	≤5 sec	1.7lb (.77kg)


ATP360
BUILDER SERIES 360° ROBOTIC PRISM


- -7mm constant
- Efficient solution compatible with Sokkia and Topcon robotic stations
- ≤5 sec. accuracy
- Six (6) precision-machined cubes mounted in solid metal core housing
- 5/8-11 mounting thread bottom

sku	constant	accuracy	wgt
03-ATP360	-7mm	≤5 sec	0.46lb (0.2kg)


LPR122
360° ROBOTIC PRISM


- Compatible with **Leica™ Systems**
- 360° prism assembly consist of six prisms bounded
- +28.1mm constant
- Centering accuracy: ± 2.0mm
- Working range up to 2000-ft (600m)
- 5/8-11 thread at bottom with quick-release adapter
- Prism height: 86mm with quick-release adapter
- Includes protective wrap, padded carrying case

sku	constant	accuracy	wgt
03-LPR122	+28.1mm	± 2.0mm	0.46lb (0.2kg)


2360
360° ROBOTIC PRISM

- Compatible with **Leica™ Systems**
- 360° prism assembly consist of six prisms bounded
- +23.1mm constant
- Centering accuracy: ± 2.0mm
- Working range up to 2000-ft (600m)
- 5/8-11 thread at bottom with quick-release adapter
- Prism height: 86mm with quick-release adapter
- Includes protective wrap, prism pole adapter, padded carrying case

sku	constant	accuracy	wgt
03-2360	+23.1mm	± 2.0mm	1.30lb (0.60kg)

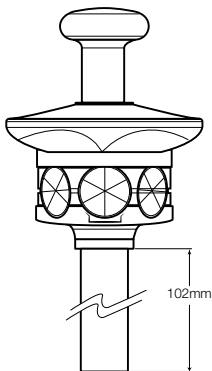
3600
360° ROBOTIC PRISM SYSTEM

- Precision 360° robotic prisms ensure tracking lock
- Compatible with **Spectra™ Systems**
- Seven (7) 25.4mm prisms; ≤5 sec. accuracy
- Includes 4-in (102mm) height adapter system with 5/8-11 thread, padded carrying case

sku	constant	accuracy	wgt
03-3600	+2.0mm	≤5sec	1.11lb (0.5kg)



05-1400-GY
OPTICAL PLUMMET TRIBRACH

- High precision, smooth locking mechanism with secure motion foot screws
- Access for Japanese-style EDM systems, electronic and optical theodolites
- Precise alignment of the support cavity to the 5/8-11 threaded base plate ensures accurate centering of instrument
- Circular vial with 10-minute/2mm sensitivity
- Push-pull slide focus
- Optical plummet— over point accuracy 0.5mm - 15m
- Weighs 1.85lb (0.84kg)


05-1300-B
LASER TRIBRACH

- High precision, smooth locking mechanism with secure motion foot screws
- Circular vial with 8-minute sensitivity
- Precise alignment of support cavity to the 5/8-11 threaded base plate ensures accurate centering of instrument
- Laser plummet— accuracy 0.5mm - 15m
- Push-button switch located close to body prevents accidental powering on
- CR2 Lithium battery (included) provides 10 hours of continuous operation
- Weighs 2.2lb (0.98kg)


05-1201-B
BASIC TRIBRACH

- Smooth locking mechanism
- 8-minute circular vial
- Precision-aligned support cavity on 5/8-11 threaded base plate ensures accurate centering of instrument
- Includes padded carrying case
- Weighs 1.85lb (0.84k)


05-1200
EUROPEAN OPTICAL PLUMMET TRIBRACH

- Smooth locking mechanism
- 8-minute circular vial
- Precision-aligned support cavity on 5/8-11 threaded base plate ensures accurate centering of instrument
- Optical plummet— over point accuracy 0.5mm - 15m
- Available colors: Black (-B) or Yellow (-Y)
- Weighs 1.85lb (0.84kg)



05-1200-B

05-1200-BBAG
TRIBRACH WITH CASE

- Protects tribrach during transport and storage
- Bag (21-1200) is also available separately (fits all 05-1200 model tribrachs)
- Size: 9-in x 8.5-in x 5.5-in
- Includes 05-1200-B Tribrach, padded case



21-1200

2500-SERIES
TRIBRACH ADAPTERS

- Anodized black aluminum
- 5/8-11 brass thread mounting
- Anodized aluminum mounting studs



05-2520



05-2521



05-2525

sku	style
05-2520	Fixed Tribach Adapter, 5/8-11 female thread
05-2521	Friction Type Rotating Tribach Adapter
05-2525	Zeiss/Wild Type Rotating Tribach Adapter, Adjustable

3511K
TRAVERSE ADAPTER SYSTEMS

- For precise setups and traversing applications
- 2.5X optical plummet
- 60-second plate vial, adjustable
- Precision-machined axis rotates 360°
- Compatible with all prisms with a 24.9mm bayonet base
- Adjustable height: 100mm to 120mm
- Traverse tribrach adapter fits all standard three-prong tribrachs
- The over point accuracy is 0.5mm at 1.5m


21-3500
PROTECTIVE HARD CASE

- Padded to protect instruments during transport and storage
- Carries your traverse kit
- Included with 05-3511K

sku	description
05-3511-K	Traverse Kit - Includes 05-3511 Tribach Adapter, 05-1201-B Tribach, 03-1010-O Prism System (Page 12), 21-3500 Padded Hard Case
05-3511	Traverse Tribach Adapter with Optical Plummet
21-3500	Padded Hard Case, for Traverse Kit
05-1200-B	European Optical Plummet Tribach
03-1010-O	0/-30mm Single Tilting Prism System (Page12)

All SitePro rods and poles include carrying case with shoulder strap

Place your company logo and contact on poles. Ask for details.

QuickTip™
Adapter Set Included

QuickTip™

VERSATILITY ON THE JOBSITE

ALL PRISM POLES INCLUDE THE UNIVERSAL ADAPTER SET

INCLUDED with 2.6m, 3.6m, and 4.65m Prism Poles

Includes QuickTip adapters to set fixed height of pole for use with **Zeiss 360**, **CST 1010**, **SitePro 1010**, and others with target height of 100mm

4700-SERIES

TWIST-LOCK PRISM POLE

- Designed for 5/8-11 QuickTip adapters for prism mounting (includes adapter set)
- Twist-lock system with built-in 20-minute precise level vial
- The soft rubber knob is easy to tighten and loosen
- Inner aluminum pole with dual graduations: 10ths and metric
- Red/white aluminum outer pole
- Includes 07-2090-50A adapter, 07-2090-135A adapter, carrying case with shoulder strap

sku	length	inner grads	wgt	mounting type	sect.
07-4708-TMA	8.5-ft (2.6m)	10ths / metric	3.1lb (1.4kg)	5/8-11	2
07-4712-TMA	11.81-ft (3.6m)	10ths / metric	4.1lb (1.85kg)	5/8-11	3
07-4715-TMA	15.25-ft (4.65m)	10ths / metric	6.2lb (2.79kg)	5/8-11	4

4700-FY SERIES

HI-VIS TWIST-LOCK PRISM POLE

- Designed for 5/8-11 QuickTip adapters for prism mounting (includes adapter set)
- Twist-lock system with built-in 20-minute precise level vial
- The soft rubber knob is easy to tighten and loosen
- Inner aluminum pole with dual graduations: 10ths and metric
- High-visibility flo-yellow outer pole with anodized graduations in 10ths
- Includes 07-2090-50A adapter, 07-2090-135A adapter, carrying case with shoulder strap


sku	length	inner grads	wgt	mounting type	sect.
07-4705-TMA-FY	4.9-ft (1.49m)	10ths / metric	2.8lb (1.29kg)	5/8-11	3
07-4708-TMA-FY	8.5-ft (2.6m)	10ths / metric	3.1lb (1.4kg)	5/8-11	2
07-4712-TMA-FY	11.81-ft (3.6m)	10ths / metric	4.1lb (1.85kg)	5/8-11	3
07-4715-TMA-FY	15.25-ft (4.65m)	10ths / metric	6.2lb (2.79kg)	5/8-11	4

4027

0.7M (2.3') MINI PRISM POLE

- Twist-locking mechanism with built-in 20-minute vial
- 2-section aluminum pole system
- Replaceable hardened point
- Dual graduations: 10ths and metric
- 5/8-11 adjustable QuickTip™ adapter (#07-2090-135A) included
- Extended: 2.3-ft (70cm), collapsed: 19.5-in (50cm)
- Includes 07-2090-135A adapter, carrying case with shoulder strap


sku	length	inner grads	wgt	mounting type	sections
07-4027-TMA-FY	2.3-ft (0.7m)	10ths / metric	1.23lb (0.56kg)	5/8-11, Adj.	2

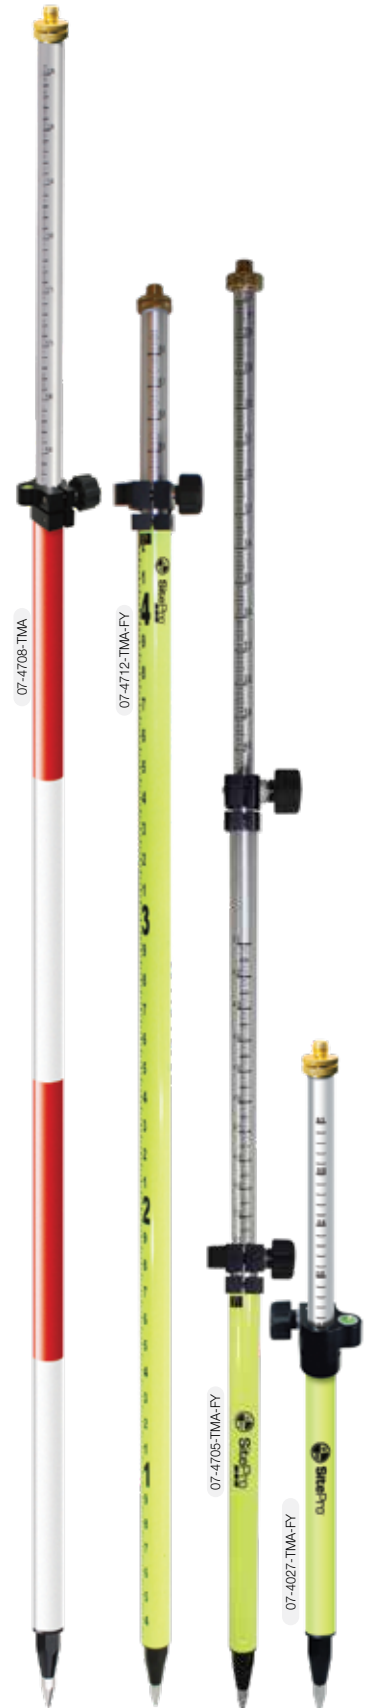

2090-SERIES

QUICKTIP™ POLE ADAPTERS

- Precision-machined aircraft aluminum
- 5/8-11 male pole mounting thread
- Compatible with the QuickTip™ series poles and other prism poles with this type of interchangeable design
- Adapters length is designed to achieve 150mm target height



sku	target(s) designed for	target height	adapter 'L'
07-2090-100	Topcon APT1 and APT2	50mm	100mm
07-2090-135A	5/8-11 Adj. Adapter	50-135mm	n/a
07-2090-15	Trimble RMT	135mm	15mm
07-2090-150	GPS Antenna	0mm	150mm

sku	target(s) designed for	target height	adapter 'L'
07-2090-35	SitePro 2010M	115mm	35mm
07-2090-50	GPH1, SitePro 03-3024	86mm	50mm
07-2090-50A	Zeiss 360° Prism, CST 1010	100mm	50mm
07-2090-73	Topcon 360 Prisms	77mm	73mm



4001

MINI STAKEOUT POLE, 1.28 FT

- One-piece aluminum pole system
- Built-in 20-minute precision level vial
- Point can be removed to use as a pole extension, 1-1/4-in outside diameter
- Includes replaceable hardened prism pole point

sku	length	wgt	mounting type	sections
07-4001-FY	1.28-ft (0.39m)	1.5lb (0.68kg)	5/8-11, Fixed	1



4047

4.7-IN MINI HANDHELD ROD

The SitePro mini handheld rod features a 5/8-11 threaded stud with an adjustable bubble vial. Use with any prism system that fits the 5/8-11 male thread.

- Height of 4.7-in (120mm)
- Built-in adjustable 20-minute circular bubble vial
- Removable tip
- Carrying case not available

sku	length	material	wgt	mounting type
07-4047	4.7-ft (120mm)	Aluminum	0.4lb (0.18kg)	5/8-11, Fixed




5100-SERIES

POLE EXTENSIONS, ALUMINUM

The 5100-Series aluminum pole extensions have 5/8-11 female threads on the bottom and 5/8-11 male threads on the top to allow more added sections.

- 1.25-in (32mm) outside diameter
- Various sizes available
- High-visibility flo-yellow

sku	length	type	weight
07-5130-FY	1-ft	Aluminum	1.00lb (0.45kg)
07-5143-FY	1m	Aluminum	1.30lb (0.59kg)
07-5144-FY	50cm	Aluminum	1.00lb (0.45kg)
07-5145-FY	25cm	Aluminum	0.90lb (0.41kg)

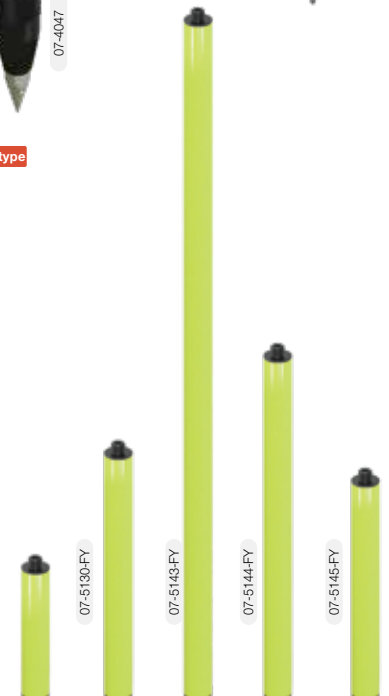

THE ULTIMATE TOPOGRAPHIC POLE



QuickTip™ Set



4626-TM

TOPOGRAPHIC QUICKTIP™ CARBON FIBER PRISM POLE

Lightweight, rugged, weatherproof, versatile pole designed for professional surveyors to quickly adapt for GPS, robotic, or total station surveying. Features inner aluminum pole with dual graduations, easy grip twist-lock with locking pin mechanism and QuickTip system.

- Carbon fiber pole with aluminum inner pole, dual graduations (0.01-ft/ 0.1cm)
- Interchangeable QuickTip adapters to achieve correct target height
- Locking pin secures pole to prevent slipping of pole section
- Built-in 20-minute bubble vial
- Soft grip, twist-lock knob tightens and loosens easily to secure two sections
- Compatible with most targets, prisms, or GPS antennas
- Includes carrying case, 2090-135A universal adjustable adapter, and 2090-150 GPS mounting adapter

sku	grads	lengths	inner pole	locking positions	adapter included	wgt
07-4626-TM	Dual	1.52 to 2.60m (4.97 to 8.53-ft)	Aluminum	1.8m, 2.0m, 2.2m, 2.4m	2090-135A, 2090-150	2.5lb (1.2kg)

QUICKLY ADAPT FOR GPS, ROBOTIC, OR TOTAL STATION



Includes 50mm
Height Adapter

4602-TM

IMPROVED! NOW WITH 2.0M LOCKING PIN POSITION

8.6-FT CARBON FIBER ROBOTIC POLE

Designed to work with the **Topcon®-style** 360° prism and remote control. An essential accessory for the Topcon-style robotic total stations.

- Carbon fiber outer pole, dual graduations (0.01-ft/ 0.1cm); black aluminum inner pole, dual graduations (0.01-ft/ 0.1cm) for direct reading
- Locking pin secures pole to prevent slipping of pole section
- 5/8-11 thread fixed male tip
- Built-in 20-minute bubble vial
- Soft grip, twist-lock knob tightens and loosens easily to secure two sections
- Includes; 50mm adapter, carrying case


sku	grads	lengths	inner pole	locking pin positions	wgt
07-4602-TM	Dual	4.90 to 8.60-ft (1.52 to 2.60m)	Aluminum	2.0M, 5.5-ft, 6.0-ft, 6.5-ft, 7.0-ft, 7.5-ft, 8.0-ft, 8.5-ft	2.5lb (1.2kg)

3812

3.6M RANGE POLE

- Lightweight, 3-sections with point
- Aluminum poles with steel point
- 4-ft sections with alternate white & red striping
- Three (3) 1-1/4-in (32mm) diameter poles with 5/8-11 male and female thread metal inserts
- Includes carrying case and rubber boot

sku	length	material	locking	wgt	mounting type	sections
09-3812	Fixed, 3.6m (12-ft)	Aluminum Red/White	5/8-11	3.4lb (1.54kg)	5/8-11, Adj. H.I.	3

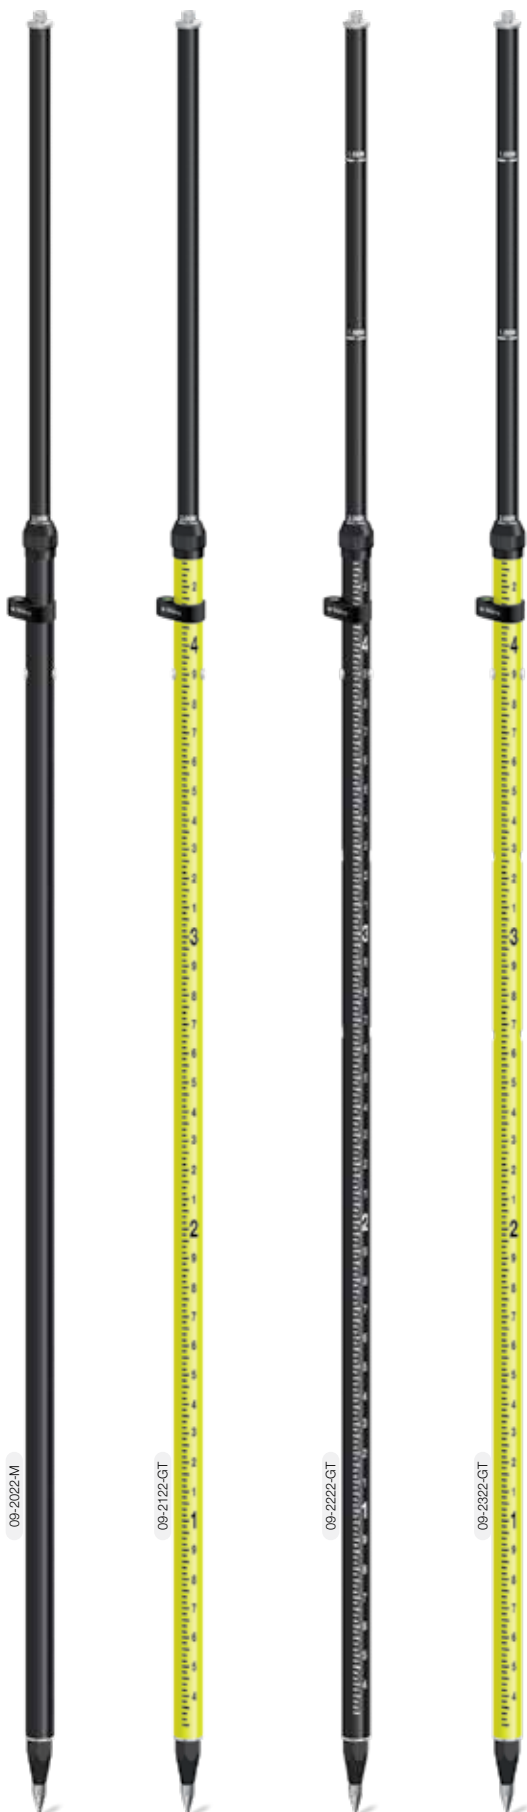
2022

2 METER CARBON FIBER SNAP-LOC ROVER ROD

- Snap-loc for non-slip positioning, secures height at 2.0m
- Compression lock mechanism
- On-board 20-minute, adjustable circular vial
- Lightweight telescoping 2-section pole



sku	length	heights	material	grads	wgt
09-2022-M	2.0m	2m, Collapses to 4.5-ft (1.37m)	Carbon Fiber, Black	n/a	1.8lb (0.82kg)

2122

2 METER ALUMINUM SNAP-LOC ROVER ROD

- Snap-loc for non-slip positioning, secures height at 2.0m
- Compression lock mechanism
- On-board 20-minute, adjustable circular vial
- Lightweight telescoping 2-section pole



sku	length	heights	material	grads	wgt
09-2122-GT	2.0m	2m, Collapses to 4.5-ft (1.37m)	Aluminum, Fluorescent	10ths 100ths	2.4lb (1.09kg)

2222

3-POSITION CARBON FIBER SNAP-LOC GPS ROVER ROD

- Lightweight 2-section telescoping **carbon fiber** rod
- Snap-loc for no slip with compression lock - 3 height positions: 2m, 1.8m or 1.6m and collapses to 4.5-ft (1.37m)
- On-board 20-minute, adjustable circular vial



sku	length	heights	material	grads	wgt
09-2222-GT	2.0m	1.6m, 1.8m, 2m; Collapses to 4.5-ft (1.37m)	Carbon fiber	10ths 100ths	1.8lb (0.82kg)
09-2222-GM	2.0m	1.6m, 1.8m, 2m; Collapses to 4.5-ft (1.37m)	Carbon fiber	Metric	1.8lb (0.82kg)

2300

3-POSITION ALUMINUM SNAP-LOC GPS ROVER ROD

- **All-aluminum** 2-section telescoping rod
- Snap-loc for no slip with compression lock - 3 height positions: 2m, 1.8m or 1.6m and collapses to 4.5-ft (1.37m)
- On-board 20-minute, adjustable circular vial



sku	length	heights	material	grads	wgt
09-2322-GT	2.0m	1.6m, 1.8m, 2m; Collapses to 4.5-ft (1.37m)	Aluminum	10ths 100ths	2.2lb (0.99kg)
09-2322-GM	2.0m	1.6m, 1.8m, 2m; Collapses to 4.5-ft (1.37m)	Aluminum	Metric	2.2lb (0.99kg)

90 day guarantee on all poles

All SitePro rods and poles include carrying case with carrying strap

Place your company logo and contact on poles. Ask for details.

2002 / 2102
2M TWO-PIECE ROVER ROD

- Available in lightweight carbon fiber or aluminum model
- Model 2102-M features cable slots to protect the connection cable(s)
- Fixed height at two (2) meters
- Built-in on-board 20-minute, adjustable circular vial
- Easy soft-grip

IMPROVED DESIGN


SureFit™
Thread Design
for optimal
performance
and durability
of rod

sku	length	color	material	mounting type	wgt	sections
SureFit 09-2002-M	Fixed 2.0M (6.56-ft)	Black	Carbon fiber	5/8-11, Fixed	1.76lb (0.80kg)	2
09-2102-M	Fixed 2.0M (6.56-ft)	Flo-Yellow	Aluminum	5/8-11, Fixed	4.0lb (1.81kg)	2

100-SERIES
GPS ANTENNA TRIPOD

The SitePro 100S GPS antenna tripod, ideal for GPS and machine-control applications, features aluminum construction with extendable tripod legs and 2 Meter center staff with twist-lock mechanisms.

- Center staff rotates 360° to check calibration of plumb
- Built-in 8-minute bubble vial
- 3-position center staff with steel locking pin adjusts to 3 heights: 2.0m, 1.8m, 1.5m
- Lightweight, heavy-duty aluminum legs and staff are electrostatically powder-coated in flo-lime paint
- Aluminum hardware is anodized black
- Large attachable soft-turf spurs (included) for more grip to maximize stability in soft-ground applications and prevent twisting, ideal when using angle measuring instruments such as robots
- Built-in compass with 8-minute vial
- Removable 5/8-11 threaded head adapter
- Replaceable points
- Includes Soft-Turf spur set, heavy-duty bag



sku	locking type	center locking	open	collapsed	wgt
09-100S-FY	Twist-Lock	2.0m, 1.8m, 1.5m	79-in (201cm)	50-in (127cm)	15lb (6.8kg)

GLS5818
NEW!
1.8M CARBON FIBER GPS POLE

This all-carbon fiber rover rod is lightweight and offers fast setup with quick-clamp locking system. Built-in centering bubble ensures precise with adjustable circular vial.

- Four (4) telescoping sections with quick-clamp locking system
- Adjustable height from 1.5m to 1.8m with secure locking positions
- Removable steel tip with replaceable shoe points
- 5/8-11 mounting thread design is compatibility with most GNSS RTK receivers
- Compact at 27.2-in (69cm) when collapsed
- Includes a carry bag for easy transport and adjustment tool

sku	length	heights	material	sections	wgt
09-GLS5818	1.8m	1.5m, 1.6m, 1.7m, 1.8m; Collapses to 27.2-in (69cm)	Carbon fiber	4	1.8lb (0.82kg)


09-100S-FY

09-GLS5818

09-PSW4000
NEW!
SHOE-POINT-WHEEL FOR GPS SCANNING

The GPS rod shoe point and wheel streamlines surveying with a single-wheel mechanism that switches easily between rolling and stationary modes. Its wear-resistant wheel, durable metal tip, and quick-release adapter ensure precise adjustments and reliable performance in any environment.

- Rolling mechanism improves efficiency and simplifies surveying workflows
- 0.10m change to rod height, same rod height in wheel or point mode
- Maintains consistent rod height in both wheel and point modes
- Switch easily between wheel and point modes by pulling the pin
- Overall height: 186.5mm
- Weighs 0.8lb (0.36kg)

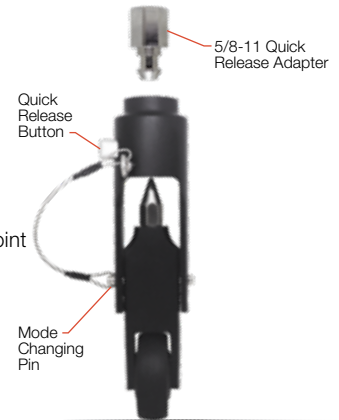
09-CF1730
NEW!
CARBON FIBER SCANNER TRIPOD

The all-carbon fiber tripod is a lightweight yet durable choice for 3D laser scanners. Its adjustable 4-section legs ensure versatility for various tasks, while the combi feet and slip guard provide stability on both indoor and outdoor surfaces. With features like an interchangeable head insert and a built-in bubble level, this tripod delivers precision, reliability, and convenience for professionals.

- Lightweight and durable carbon fiber reinforced polymer (CFRP) construction
- Four-section telescoping legs with adjustable height from 21.25-in to 65-in (0.54m to 1.65m)
- Adjustable slip guard prevents legs from sliding on smooth surfaces
- Large top plate, 5.5-in (140mm) diameter, with 5/8-11 thread
- Small top plate, 3.0-in (74mm) diameter, with 5/8-11 thread
- Combi tripod feet for use on both sensitive indoor floors and outdoor terrain
- Built-in bubble vial for precise setup
- Maximum load of 55lbs (25kg)
- Weighs 3.4lbs (1.6kg)


09-TD5616
NEW!
TRIPOD DOLLY FOR 3D SCANNING

Achieve smooth and seamless tripod movement with this versatile dolly. Compatible with most tripods, it supports lightweight and heavy-duty models with sharp or round tip feet. Features locking points to secure the tripod legs in place and a durable band to keep the feet firmly positioned during use, ensuring stability and ease of transport.

- 3-in (76mm) wheel with wheel locks and extra rubber ring to secure tripod foot
- Legs foldable to 18-in. (45 cm), legs can be extended from 14-in to 19-in (35.6 - 43.2cm)
- Replacement wheels available (Z09-TD5610-W)
- Load capacity: 65lbs (30kg)
- Weighs 5.7lb (2.6kg)
- Includes padded carrying case



Dolly in Use w/ Tripod

09-114 SERIES MAGNET MOUNT

- Light weight and flexible
- Strong magnet(s) to ensure secure and stabilize position



sku	description	magnet	height	weight
09-114-01	Triple Mount with Quick Release connector for R10	Three (3) 4.5-in (115mm) diameter magnets - w/spring design	6.375-in (162mm)	3.75lb (1.70kg)
09-114-10	Triple Mount with 5/8-11 thread connector for GNSS antennas	Three (3) 4.5-in (115mm) diameter magnets- w/spring design	6.0-in (152mm)	3.75lb (1.70kg)
09-114-050	Single Magnet Mount with 5/8-11 tip	Single (1) 3.5-in (90mm) diameter magnet	n/a	1.17lb (0.53kg)

Design Your Own Custom Solution for Securing Your Data Collector or Controller

5200-SERIES SUREGRIP QUICK-RELEASE CRADLES

The SureGrip quick-release cradles feature a clamping system that easily secures data collector/controller without crushing it.

- Anti-crush, quick-release design locks cradle securely when tightened
- Plugs directly into quick-release pole clamps
- Easily secures data collector/controller with anti-crush, quick-release design that locks cradle when tightened
- Durable, anodized aluminum design
- Includes replaceable silicone pads that hold the controller securely



item	designed to fit	wgt
10-52139	Ranger 7™, TSC 7™	0.55lb (0.25kg)
10-5265	TSC3	0.46lb (0.21kg)

item	designed to fit	wgt
10-5274	Surveyor 2, Allegro 2	0.49lb (0.23kg)
10-5277	MESA 2, FC-5000, RT3	0.45lb (0.20kg)



10-5246C SUREGRIP SYSTEM FOR TSC5

- Designed for the TSC5 Controller
- Made of durable, machined, and anodized aluminum and stainless steel
- Easily secures data collector/controller with anti-crush, quick-release design that locks cradle when tightened
- Quick-release clamp fits 1.25-in (32mm) pole and has six tilt positions



QR SERIES QUICK-RELEASE CLAMP SYSTEMS

- Easily secures to pole with special design to prevent overtightening the pole clamp screw
- Ideal for RTK and GNSS surveys requiring a pole and a data collector
- Made of anodized aluminum for durability and performance
- Compatible with most popular quick-release cradles to hold data controllers

sku	description	fits (dia.)
10-5215	QR Pole Clamp	1.25-in (32mm)
10-5215X	QR Pole Clamp w/20-min Vial & Compass	1.25-in (32mm)
10-52154	QR Pole Clamp with Compass	32mm (1.25-in)
10-52160	BAS Pole Clamp	1.25-in (32mm)
10-52201	BAS Link	1-in (25.4mm) Ram Ball



11-750
ROD LEVEL

- Fits round or rectangular rods for quick setup of your leveling rod with convenience
- Strong die-cast aluminum housing and adjustable vial
- Strong aluminum housing, quickly level your leveling rod with convenience
- Large, easy to read 30-minute bubble vial
- Works with all leveling staffs and prism poles


11-751
HEADS UP ROD LEVEL

- Specially designed for safety while performing routine surveys in traffic areas
- Clamps onto a rod up to 1.25-in (32mm) diameter and allows user to simply look through the side window to check level while keeping partner in sight
- Twist-lock knob for clamping to rod or pole
- 20-minute bubble vial for accurate and quick setup
- Special mirror allows for direct reading of adjustable circular bubble


07-ADAPTERS
MOUNTING ADAPTERS


07-2080



07-2090-24



07-2090-76



07-2131



07-5180



07-5181

sku	length	material
07-2080	Snap-on Type Prism Adapter	Black anodize aluminum
07-2090-24	GPS quick-release adapter	Black anodize aluminum
07-2090-76	GPS quick-disconnect 76.2mm adapter	Black anodize aluminum

sku	length	material
07-2131	Adapter 5/8 Female to 1/4 Male	Black anodize aluminum
07-5180	Adapter 5/8-11 Double male	Black anodize aluminum
07-5181	Adapter 5/18-11 Double Female	Black anodize aluminum

*Note: consider heights in your software or when post-processing your data in the office.

07-191-A
PRISM POLE TOPO SHOE

- Precision-machined aluminum body with 1-in (25.4mm) base
- 5/8-11 female thread
- Height: 3.37-in (85.6mm); Weighs 0.34lb (0.16kg)


07-191-B
PRISM POLE TOPO SHOE

- Aluminum body with 2.5-in (64mm) wide base
- 5/8-11 female thread
- Height: 3.37-in (85.6mm); Weighs 1.26lb (0.57kg)


07-PS4000
PRISM POLE SHOE W/POINT

- Designed for prism poles and bipods
- Anodized aluminum body
- 5/8-11 female thread
- Easy to replace sharp steel point
- Height: 3.37-in (85.6mm)
- Weighs 1.26lb (0.57kg)


07-1460
SNAP-LOC CLIP

- Attaches to the lower section of any 1-1/4-in (32mm) diameter prism or antenna pole
- Construction with high strength poly material
- Bipod legs snap into the clips making the system convenient for storage and transport





- Open-Side Clamping System
- Anti-Crushing
- Fits 1-in to 1.5-in Poles

4260
ANTI-CRUSH

V-SERIES ANTI-CRUSH THUMB-RELEASE BIPOD

The SitePro 4260 is designed to provide non-slip grip while preventing user from over-tightening clamp and crushing the prism pole. Used by a surveyor to set up a freestanding GPS antenna pole or prism pole. Easy grip twist-lock for securing pole.

- Side-entry head with open clamp for quick and easy pole setup
- Reinforced feet with replaceable points
- Unique locking system provides non-slip quick clamping
- Easily adjust height of legs independently with thumb release push-buttons
- Fits 1-in to 1-1/2-in (25mm-38mm) diameter poles
- Includes velcro strap to secure legs during transport

sku	type	color	style	fits (pole diameter)	open	closed	wgt
07-4260	Aluminum	Flo-Yellow	Open-Side, Anti-Crush	1-in to 1-1/2-in (25mm-38mm)	71-1/2-in (182cm)	42-1/2-in (108cm)	4.3lb (1.95kg)



- Open-Face Clamping System
- Anti-Crushing
- Fits 1-in to 1.5-in Poles

4364
ANTI-CRUSH

ALUMINUM ANTI-CRUSH THUMB-RELEASE BIPOD

The SitePro 4364 is designed to provide non-slip grip while preventing user from over-tightening clamp and crushing the prism pole. Used by a surveyor to set up a freestanding GPS antenna pole or prism pole. Fits 1 to 1.25-in (25.4 to 32mm) outside diameter poles easily through the open-face head with anti-crush clamp. 1.5-in (38mm) poles can be attached easily through the top of the open face clamp.

- Open-face head with anti-crush clamp for quick and easy pole setup
- Unique anti-crush locking system provides non-slip quick clamping
- Fits 1-in to 1-1/2-in (25mm-38mm) diameter poles
- Easily adjust height of legs independently with thumb release push-buttons
- Replaceable points
- Includes velcro strap to secure legs during transport

sku	type	color	style	fits (pole diameter)	open	closed	wgt
07-4364-FY	Aluminum	Flo-Yellow	Open-Face, Anti-Crush	1-in to 1-1/2-in (25mm-38mm)	71-in (182cm)	42-in (108cm)	4.7lb (2.13kg)



- Open-Side Clamping System
- Fits 1-in to 1.5-in Poles

4360

ALUMINUM THUMB-RELEASE BIPOD

Easily set up a freestanding GPS antenna pole or prism pole. Fits 1 to 1.25-in (25.4 to 32mm) outside diameter poles easily through the side entry head with open clamp. 1.5-in (38mm) poles can be attached easily through the top of the open clamp.

- Side-entry head with open clamp for quick and easy pole setup
- Unique locking system provides non-slip quick clamping
- Easily adjust height of legs independently with thumb release push-buttons
- Fits 1 to 1-1/2-in (25mm-38mm) diameter poles
- Replaceable points
- Includes velcro strap to secure legs during transport

sku	type	color	style	fits (pole diameter)	open	closed	wgt
07-4360-FY	Aluminum	Flo-Yellow	Open-Side	1-in to 1-1/2-in (25mm-38mm)	70-in (178cm)	42-in (108cm)	4.7lb (2.13kg)
07-4360-Y	Aluminum	Yellow	Open-Side	1-in to 1-1/2-in (25mm-38mm)	71-in (182cm)	42-in (108cm)	4.7lb (2.13kg)

90 day guarantee on all poles

All SitePro bipods include carrying case with carrying strap

Place your company logo and contact on poles. Ask for details.





4365

ANTI-CRUSH

ANTI-CRUSH THUMB-RELEASE BIPOD

The SitePro 4365 is constructed of carbon fiber and used to quickly set up a freestanding GPS antenna pole or prism pole.

- Open-face head with anti-crush clamp for quick and easy pole setup
- Unique locking system provides non-slip quick clamping
- Fits 1.0 to 1.5-in (25.4 to 38mm) outside diameter poles easily through the open-face entry head
- Easily adjust height of legs independently with thumb release push-buttons
- Replaceable points
- Includes velcro strap to secure legs during transport

- Open-Face Clamping System
- Anti-Crushing
- Fits 1-in to 1.5-in Poles

sku	type	color	style	fits (pole diameter)	open	closed	wgt
07-4365	Carbon Fiber	Black	Open-Face, Anti-Crush	1-in to 1-1/2-in (25mm-38mm)	71-1/2-in (182cm)	42-1/2-in (108cm)	4.1lb (1.86kg)

4360-05

THUMB-RELEASE MINI BIPOD

This Mini Bipod utilizes the same style as the 07-4360 series bipod, but shorter.

- Fits 1.0 to 1.5-in (25.4 to 38mm) diameter poles easily through the open clamp
- 1.5-in (3.81cm) outside diameter poles can be loaded through the top
- Collapses to 25-in (63.5cm) and extends to 35-in (88.9cm)
- Replaceable points

- Open-Side Clamping System
- Fits 1-in to 1.5-in Poles

sku	type	color	style	fits (pole diameter)	open	closed	wgt
07-4360-05-FY	Aluminum	Flo-Yellow	Open-Side	1-in to 1-1/2-in (25mm-38mm)	35-in (90cm)	25-in (64cm)	3.5lb (1.6kg)

4160

FIXED MINI PRISM POLE BIPOD

A simple mini bipod, ideal for use with poles under 24-in (61cm) long. The legs are a fixed length of 10-in (25cm) each.

- Side-entry head with open clamp for quick and easy pole setup
- Unique locking system provides non-slip quick clamping
- Fits 1.0 to 1.5-in (25.4 to 38mm) diameter poles easily through the open clamp
- Legs are made of solid aluminum at a fixed height of 10-in (25cm)

- Open-Side Clamping System
- Fits 1-in to 1.5-in Poles

sku	type	color	style	fits (pole diameter)	open	closed	wgt
07-4160	Aluminum	Black	Fixed Height	1-in to 1-1/2-in (25mm-38mm)	10-in (25cm)	n/a	0.8lb (0.36kg)

4250

THUMB-RELEASE TRIPOD WITH TOP ENTRY

- Tripod creates free-standing setup for GNSS antenna poles or prism poles
- Top mount universal head will accommodate 1 to 1.25-in diameter
- Features large, thumb release buttons for quick setup on even or uneven ground
- Impact-resistant materials, replaceable shoes, and quick-release telescoping aluminum legs
- Legs extend independently up to 6-ft (180cm)
- Fine adjustment knob for fine tuning your setup
- Includes carrying case

Open-Top Clamping System

sku	type	color	style	open	collapsed	wgt
07-4250	Aluminum	Flo-Yellow	Thumb Release	71-in (180cm)	42-1/2-in (108cm)	6.0lb (2.72kg)



FGC20ELAZ
ELEVATOR COMPOSITE TRIPOD

The **FGC20** is a **medium-duty fiberglass tripod** with positive locking quick clamp style clamps. Adjustable center column with height adjustment range of 20-in (51cm) and metal gear & rack system for smooth continuous motion.

- Double banded extension legs and large positive locking quick clamp for extra stability
- Precision-machined aluminum head and leg hinges provides stable mounting base
- Die-cast aluminum shoe with hardened steel replaceable shoe points
- Powder coated castings for durability and wear-resistance
- Includes heavy-duty, poly-webbing shoulder strap

sku	extend	collapse	clamping	head style	wgt
01-FGC20ELAZ-B	93-in (2.36m)	48-in (1.22m)	Quick Clamp	5/8-11, Flat Head	15lb (6.7kg)


HEAVY DUTY METAL GEAR & RACK SYSTEM

LARGE QUICK CLAMP LEVER


EXTENDS UP TO 12-FT 8-IN (3.86M)

FGH30ELAZ
ELEVATOR COMPOSITE TRIPOD

The **FGHD30** elevator tripod is a **heavy-duty with dual clamp** design for added extra stability - both positive locking quick clamp and wing screw. Tall adjustable center column with height adjustment range up to 44-in (112cm) and metal gear & rack system for smooth continuous motion.

- Double banded extension legs and large positive locking quick clamp for extra stability
- Precision-machined aluminum head and leg hinges provide stable mounting base
- Die-cast aluminum shoe with hardened steel replaceable shoe points
- Powder coated castings for durability and wear-resistance
- Includes heavy-duty, poly-webbing shoulder strap

sku	extend	collapse	clamping	head style	wgt
01-FGH30ELAZ-DCB	12-ft 8-in (3.86m)	72-in (1.82m)	Dual Clamp	5/8-11, Flat Head	33lb (15kg)



RHIVIZ20-B
SPECIAL UV-RESISTANT HI-VIZ GREEN
SALAMANDER ROBOTIC COMPOSITE TRIPOD

- Ideal for robotic total stations and laser scanners or construction lasers where accuracy is important
- **Meets ISO standard (12858-2-H)**
- Tongue-groove strut and legs for stability and accurate performance
- Heavy-duty dual clamp design adds extra stability - both quick clamp and wing screw
- Double banded extension legs and large positive locking quick clamp add stability
- Ergonomic hand carrying handle
- Large 6-5/8-in (17cm) precision-machined flat head with large 2-3/8-in (6cm) center hole for easy setup over a point
- Large foot pad for solid planting and improved stability on any terrain
- Replaceable shoe points
- Built-in retainer support tabs for adding support system to prevent leg kick out
- Includes heavy-duty poly-webbing shoulder strap, retainer strap, head protective cap, adjustment tool

sku	extended	collapsed	clamping	head style	net wgt	hardware
01-RHIVIZ20-B	70-in (180cm)	44.75-in (114cm)	Dual Clamp	5/8-11, Flat Head	17.8lb (8.1kg)	Black


SHIVIZ20-B
SPECIAL UV-RESISTANT HI-VIZ GREEN
SALAMANDER SURVEYOR COMPOSITE TRIPOD

- Ideal for both land surveying and precision construction instruments
- Durable all composite legs and struts with powder coated wear-resistant metal hardware
- Double banded extension legs and large positive locking quick clamp
- Precision-machined triangular flat head with center hole for easy setup over a point
- Precision-machined aluminum head and leg hinges provide stable mounting base
- Die-cast aluminum shoe with hardened steel replaceable shoe points
- Includes heavy-duty poly-webbing shoulder strap for ease of carrying to the job site

sku	extended	collapsed	clamping	head style	net wgt	hardware
01-SHIVIZ20-B	70-in (180cm)	44.75-in (114cm)	Quick Clamp	5/8-11, Flat Head	16.6lb (7.5kg)	Black

01-RHIVIZ20-B

Heavy-duty Ergonomic Handle

01-SHIVIZ20-B

VHIVIZ20-B
SPECIAL UV-RESISTANT HI-VIZ GREEN
SALAMANDER CONTRACTOR COMPOSITE TRIPOD

- Ideal for optical and laser construction instruments
- Medium-weight fiberglass tripod
- Powder coated wear-resistant metal hardware
- Double banded extension legs and large positive locking quick clamp
- Precision-machined triangular flat head with 5/8-11 mounting thread
- Die-cast aluminum shoe with hardened steel replaceable shoe points
- Includes heavy-duty poly-webbing shoulder strap for ease of carrying to the job site

sku	extended	collapsed	clamping	head style	net wgt	hardware
01-VHIVIZ20-B	70-in (180cm)	44.75-in (114cm)	Quick Clamp	5/8-11, Flat Head	16.0lb (7.2kg)	Black



01-VHIVIZ20-B

ALHVZ20
SALAMANDER CONTRACTOR ALUMINUM TRIPOD

- Ideal for optical and laser construction instruments
- Medium-weight, heavy gauge aluminum with added stability of double banded legs
- Positive locking quick-release clamps
- Precision-machined triangular flat head with 5/8-11 mounting thread
- Powder coated wear-resistant metal hardware
- Die-cast aluminum shoe with hardened steel replaceable shoe points
- Includes heavy-duty poly-webbing shoulder strap

sku	extended	collapsed	clamping	head style	net wgt	hardware
01-ALHVZ20	64-in (163cm)	40-in (102cm)	Quick Clamp	5/8-11, Flat Head	10lb (4.6kg)	Black



01-ALHVZ20

Place your company logo and contact on poles. Ask for details.


HVFG-DC

SITEMAX™ LARGE HEAD COMPOSITE TRIPOD WITH DUAL-CLAMP

The SiteMax HVFG is the best value heavy duty fiberglass tripod on the market. Heavy duty dual clamp design add extra stability - both quick clamp and wing screw. Large round head is precision machined to add even more stability for your instrument.

- Powder coated wear-resistant metal hardware
- Double banded extension legs and large positive locking quick clamp add stability
- Precision machined 6-in (15.2cm) round flat head with 5/8-11 mounting thread
- Replaceable shoe points
- Ergonomic hand carrying handle
- Includes heavy-duty poly-webbing shoulder strap, head protective cap, adjustment tool

sku	extended	collapsed	clamping	head style	net wgt	hardware
01-HVFG20-DCB	72-in (183cm)	47-in (119cm)	Dual Clamp	5/8-11, Flat Head	18lb (8.2kg)	Black

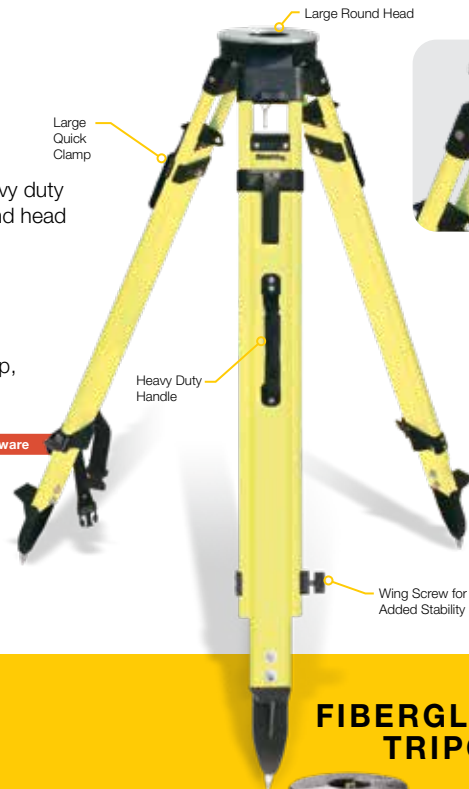

SFBR20-DCB

SURVEYOR FIBERGLASS DUAL-CLAMP TRIPOD

The SFBR is the best value heavy duty fiberglass tripod. Heavy-duty clamping design adds extra stability - both quick clamp and wing screw.

- Large 6-in round precision machined tripod head to add even more stability for your instrument
- Powder coated wear-resistant metal hardware
- Ergonomic hand carrying handle
- Double banded extension legs and large newly designed positive locking quick clamp add stability
- Replaceable shoe points
- Includes heavy-duty poly-webbing shoulder strap, head protective cap, adjustment tool

sku	extended	collapsed	clamping	head style	net wgt	hardware
01-SFBR20-DCB	71-in (181cm)	45-in (114cm)	Dual Clamp	5/8-11, 6-in Flat Head	16.1lb (7.3kg)	Black



SFBR20-B

SURVEYOR FIBERGLASS QUICK-CLAMP TRIPOD

The SFBR is the best value heavy duty fiberglass tripod. Heavy-duty quick-clamp design adds stability.

- Flat precision machined tripod head to add even more stability for your instrument
- Powder coated wear-resistant metal hardware
- Ergonomic hand carrying handle
- Double banded extension legs and large newly designed positive locking quick clamp add stability
- Replaceable shoe points
- Includes heavy-duty poly-webbing shoulder strap, head protective cap, adjustment tool

sku	extended	collapsed	clamping	head style	net wgt	hardware
01-SFBR20-B	71-in (181cm)	45-in (114cm)	Quick Clamp	5/8-11, Std Flat Head	16.1lb (7.3kg)	Black

ALQR20-DC
**HEAVY-DUTY ALUMINUM TRIPOD,
DUAL CLAMP SYSTEM**

The ALQR20-DC tripod is made of medium-weight, heavy gauge aluminum with added stability of double banded legs and dual clamping system.

- Large 6-in round precision machined tripod head to add even more stability for your instrument
- Heavy-duty clamping design adds extra stability - both quick clamp and wing screw
- Powder coated, wear-resistant metal hardware
- Replaceable shoe points
- Includes heavy-duty poly-webbing shoulder strap

sku	extended	collapsed	clamping	head style	net wgt	hardware
01-ALQR20-DCB	64-in (163cm)	40-in (102cm)	Dual Clamp	5/8-11, Flat Head	10lb (4.6kg)	Black


ALQR20
ALUMINUM TRIPOD WITH QUICK-RELEASE

The ALQR20 tripod is made of medium-weight, heavy gauge aluminum with added stability of double banded legs.

- Positive locking quick-release clamps
- Precision-machined triangular flat head with 5/8-11 mounting thread
- Powder coated wear-resistant metal hardware
- Replaceable shoe points
- Includes heavy-duty poly-webbing shoulder strap

sku	extended	collapsed	clamping	head style	net wgt	hardware
01-ALQR20-B	64-in (163cm)	40-in (102cm)	Quick Clamp	5/8-11, Flat Head	10lb (4.6kg)	Black
01-ALQR20-O	64-in (163cm)	40-in (102cm)	Quick Clamp	5/8-11, Flat Head	10lb (4.6kg)	Orange


ALQR40
DOMED-HEAD ALUMINUM TRIPOD

The ALQR-Series tripods are made of medium-weight, heavy gauge aluminum with added stability of double banded legs.

- Circular dome head for fast setup with compensated instruments and lasers
- Positive locking quick-release clamps
- Powder coated wear-resistant metal hardware
- Replaceable shoe points
- Includes heavy-duty poly-webbing shoulder strap

sku	extended	collapsed	clamping	head style	net wgt	hardware
01-ALQR40-B	64-in (163cm)	40-in (102cm)	Quick Clamp	5/8-11, Dome Head	10lb (4.6kg)	Black


EASY COLLAPSE & CARRY

Carrying your tripod to and from the jobsite with other gear or tools can be cumbersome. The heavy-duty poly-webbed shoulder strap makes it easier.

Strap is **included with all SitePro Tripods** and has built-in webbed belt with locking clip to secure legs of tripod.



ALW20
ALUMINUM TRIPOD WITH WING SCREW

The ALW20 is a heavy-duty, aluminum tripod with wing screw clamps.

- Aluminum hinge, clamp and shoe castings
- Precision-machined triangular flat head with 5/8-11 mounting thread
- Replaceable shoe points
- Powder coated castings for durability and wear-resistance
- Includes heavy-duty poly-webbing shoulder strap

sku	extended	collapsed	clamping	head style	net wgt	hardware
01-ALW20-B	65-in (165cm)	42-in (107cm)	Wing Screw	5/8-11, Flat Head	10lb (4.6kg)	Black



01-ALW20-B

01-ALW10-B

ALW10
ALUMINUM MINI-TRIPOD WITH WING SCREW

The ALW10 tripod has a small footprint, yet heavy-duty and sturdy. Features standard head with wing screw clamps.

- Aluminum hinge, clamp and shoe castings
- Precision-machined triangular flat head with 5/8-11 mounting thread
- Replaceable shoe points
- Powder coated castings for durability and wear-resistance
- Includes: carrying strap, adjustment tool

sku	extended	collapsed	clamping	head style	net wgt	hardware
01-ALW10-B	28.5-in (73cm)	22-in (56cm)	Wing Screw	5/8-11, Flat Head	6.4lb (2.9kg)	Black


ALC20
ALUMINUM TRIPOD WITH QUICK CLAMP

The ALC is a lightweight, aluminum contractors' tripod with positive locking quick clamp style clamps and individually tightened hinge screws.

- Aluminum hinge, clamp and shoe castings with shoe points
- Precision-machined triangular flat head with 5/8-11 mounting thread
- Powder coated castings for durability and wear-resistance
- Includes heavy-duty poly-webbing shoulder strap

sku	extended	collapsed	clamping	head style	net wgt	hardware
01-ALC20-B	65-in (165cm)	39-in (99cm)	Quick Clamp	5/8-11, Flat Head	9.0lb (4.1kg)	Black

Note: 01-ALC20-B is the standard tripod included with SitePro instrument kits.

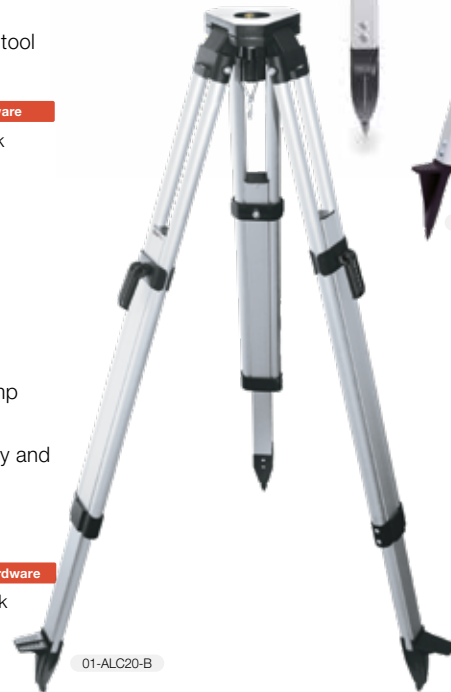


01-ALC20-B

01-TLS
TRIPOD RETAINER STRAP

- Use with tripods with clamp lock holder on legs
- Fixes the legs in place to maintain stability while you work
- Use with SitePro model RHIVIZ20 and HVFG-DC


01-TFG2
**TRIPOD
FLOOR GUIDE**

- Ideal when setting up tripod on slick surfaces and concrete floors. Makes setting up over a point faster
- Heavy-duty aluminum arms with slots to extend and stabilize tripod legs to 25.4-in (65cm) from center; additional slots to extend 14-in (35.6cm) from center
- Tripod mounts to the legs which have slots for points and rubber straps
- Weight: 1.0lb (0.45kg)

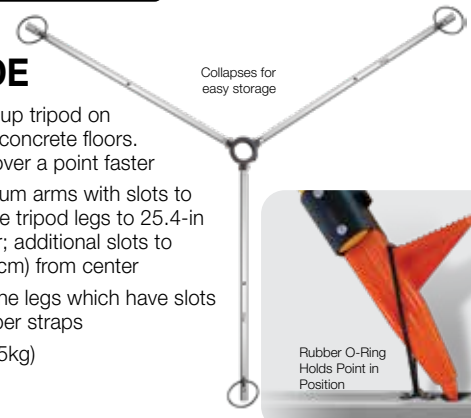
Collapses for
easy storage

Rubber O-Ring
Holds Point in
Position

SPR-SERIES

SURVEYOR'S FIBERGLASS GRADE ROD

Our most popular rods designed for surveyors, the SitePro SPR-Series leveling rods are constructed of durable, rigid fiberglass with reinforced ribs for strength and stability. Lightweight, telescoping rectangular-oval shaped sections make the SPR-Series leveling rod easier to grip and allows for widened easy-to-read scales. Graduated scales are glare-resistant with formulated coating that protects the scales from wear.

- Reliable, long-lasting spring-loaded round buttons provide tight, secure, locking of the sections, and designed to resist jamming from debris
- Special backside measuring scale allows users to read **direct height measurements** at eye level
- 1/4-20 female adapter in top section for mounting prism
- Non-conductive fiberglass is waterproof and corrosion-resistant
- Glare-resistant, easy-to-read graduations and a special measuring scale on the backside, suitable for many clearance and height measurements
- Sections are removable for easy cleaning
- Includes carrying case



MOUNTING TIP FOR MINI PRISM

Top section of leveling rod has built-in 1/4-20 female thread, ideal for mounting a mini prism




RELIABLE, SPRING LOADED BUTTONS

Section buttons (# Z11-SPRBUTTON) are round providing tight, secure, locking of the sections, and decrease jamming from debris

sku	length	graduations	sections	collapsed	wgt
11-SPR17-T	17-ft	10ths/100ths	5	48-in (122cm)	5.00lb (2.3kg)
11-SPR17-C	17-ft	Inches/8ths	5	48-in (122cm)	5.00lb (2.3kg)
11-SPR25-T	25-ft	10ths/100ths	6	58.5-in (149cm)	6.00lb (2.3kg)
11-SPR25-C	25-ft	Inches/8ths	6	58.5-in (149cm)	6.00lb (2.3kg)
11-SPR07-M	7.6m	Metric 'E', mm	6	58.5-in (149cm)	6.00lb (2.3kg)



SPR-Series include carrying case with carrying strap

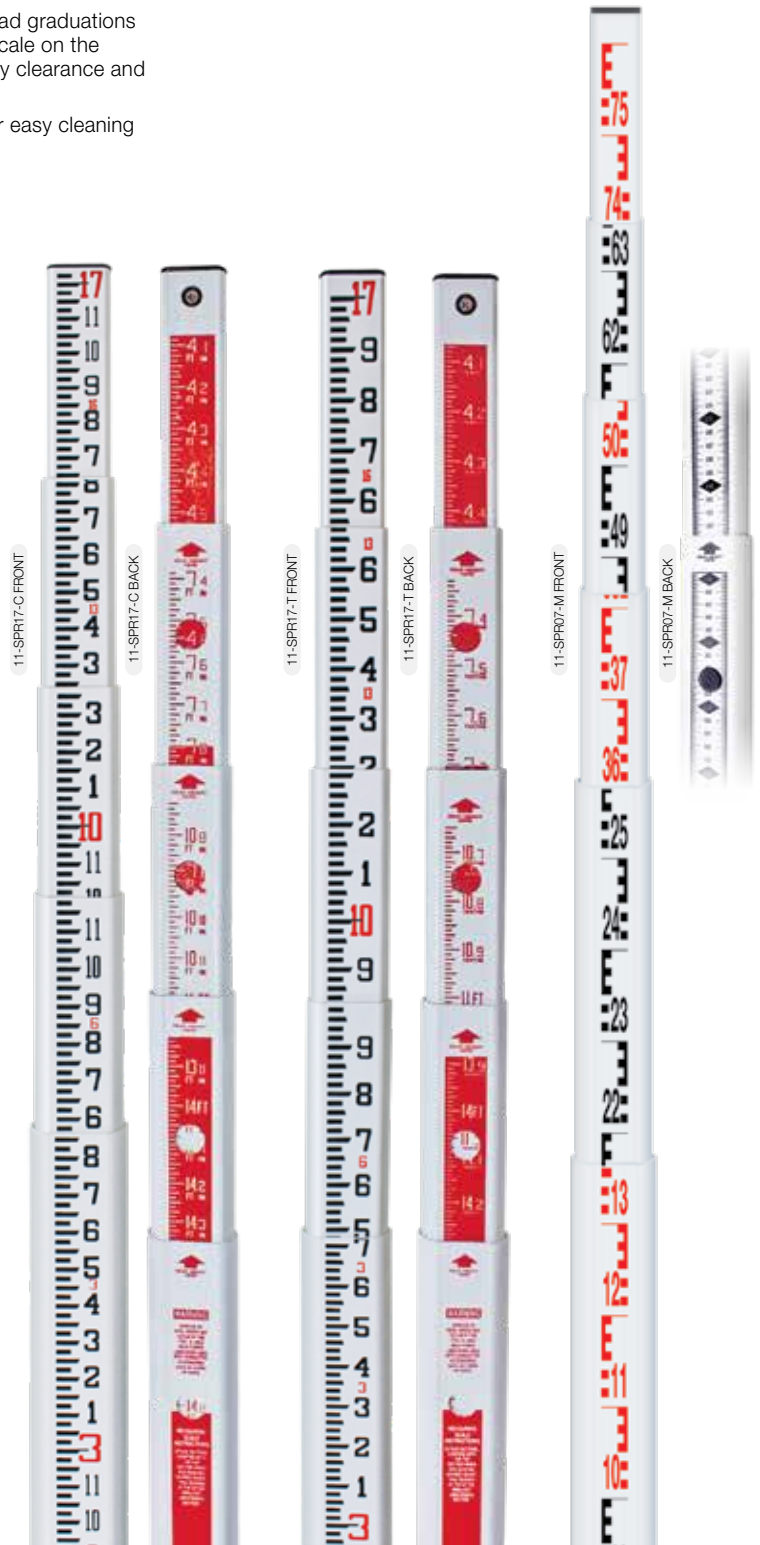

SCR20

NEW!

PATENT PENDING

20-FT CONSTRUCTION FIBERGLASS GRADE ROD

The SitePro SCR20 grade rod has same features of the SCR-Series (below), but equipped with the **NEW ZAMAK™** quick-release buttons.

- Durable **Patent Pending ZAMAK quick-release buttons** made of special metal alloy that is wear resistant and provides smooth adjustments and reliable secure locking
- Special backside measuring scale
- Rectangular shape
- Non-conductive fiberglass is waterproof and corrosion-resistant
- Sections are removable

sku	length	graduations	sections	collapsed	wgt
11-SCR20-C	20-ft	8ths	6	52.38-in (133cm)	7.85lb (3.5kg)
11-SCR20-T	20-ft	10ths	6	52.38-in (133cm)	7.85lb (3.5kg)



SCR-Series include carrying case with carrying strap

SCR-SERIES

CONSTRUCTION FIBERGLASS GRADE ROD

The SitePro SCR-Series leveling rods are constructed of durable corrosion-resistant and non-conductive fiberglass. Lightweight, telescoping rectangular shaped sections with rounded back corners make the SCR-Series leveling rod easier to grip.

Features stand-off ribs on front corners to protect the large, easy-to-read graduated scale from wear. Scales are glare-resistant with formulated coating that protects the scales from wear.

- Reliable, long-lasting spring-loaded Delrin® buttons (#Z11-SCRBUTTON) securely lock sections together, and designed to resist jamming from debris
- Rectangular shape allows for laser detector clamp to mount to any section of the leveling rod
- Special backside measuring scale allows users to read **direct height measurements** at eye level
- Non-conductive fiberglass is waterproof and corrosion-resistant
- Sections are removable for easy cleaning

sku	length	graduations	sections	collapsed	wgt
11-SCR13-C	13-ft	8ths	4	58-in (148cm)	4.5lb (2.0kg)
11-SCR13-T	13-ft	100ths	4	58-in (148cm)	4.5lb (2.0kg)
11-SCR16-C	16-ft	8ths	5	57-in (145cm)	6.2lb (2.8kg)
11-SCR16-T	16-ft	100ths	5	57-in (145cm)	6.2lb (2.8kg)
11-SCR25-C	25-ft	8ths	6	63.5-in (161cm)	10lb (4.5kg)
11-SCR25-T	25-ft	100ths	6	63.5-in (161cm)	10lb (4.5kg)
11-SCR05-M	5m	Metric 'E'	5	57-in (145cm)	6.2lb (2.8kg)



MOUNTING TIP FOR MINI PRISM

Top section of leveling rod has built-in 1/4-20 female thread, ideal for mounting a mini prism.





GRADUATED IMPRINTED BACKSIDE

Special backside measuring scale allows users to read **direct height measurements** at eye level

ZAMAK QUICK RELEASE BUTTON

New button design provides greater impact resistance, increased durability and optimal operation in a wide variety of temperatures and environments.

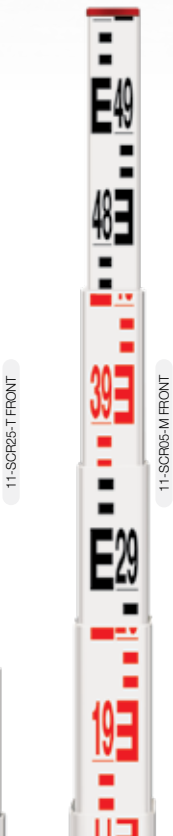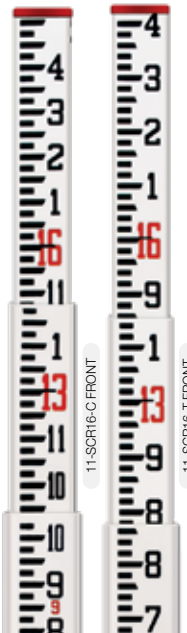

CONSTRUCTED TOUGH

DURABLE, RIGID FIBERGLASS WITH REINFORCED DESIGN FOR STRENGTH & STABILITY

11-8 SERIES
ALUMINUM LEVELING RODS

The SitePro telescoping aluminum leveling rod are constructed with durable, lightweight aluminum alloy that allows smooth extension and prevents unnecessary clattering.

The 11-8 series are imprinted with weather and corrosion-resistant inks. The telescoping sections are injection molded section joints and capped with secure high-strength buttons.


- Lightweight and durable telescoping aluminum leveling rods
- Heavy-duty aluminum wall thickness
- Easy-to-read graduations with measuring scale on the backside for **direct height measurements** at eye level
- Three different units of measure are available, see graduations: 8ths, 100ths, and Metric
- Includes leveling bubble vial attachment and carrying case


SNAP-IN PUSH-BUTTON

High-strength push-buttons with injection molded section joints for secure locking of telescopic sections


**ATTACHABLE
ROD LEVEL**

Bubble vial attachment easily clips into slot for quick leveling of aluminum rods

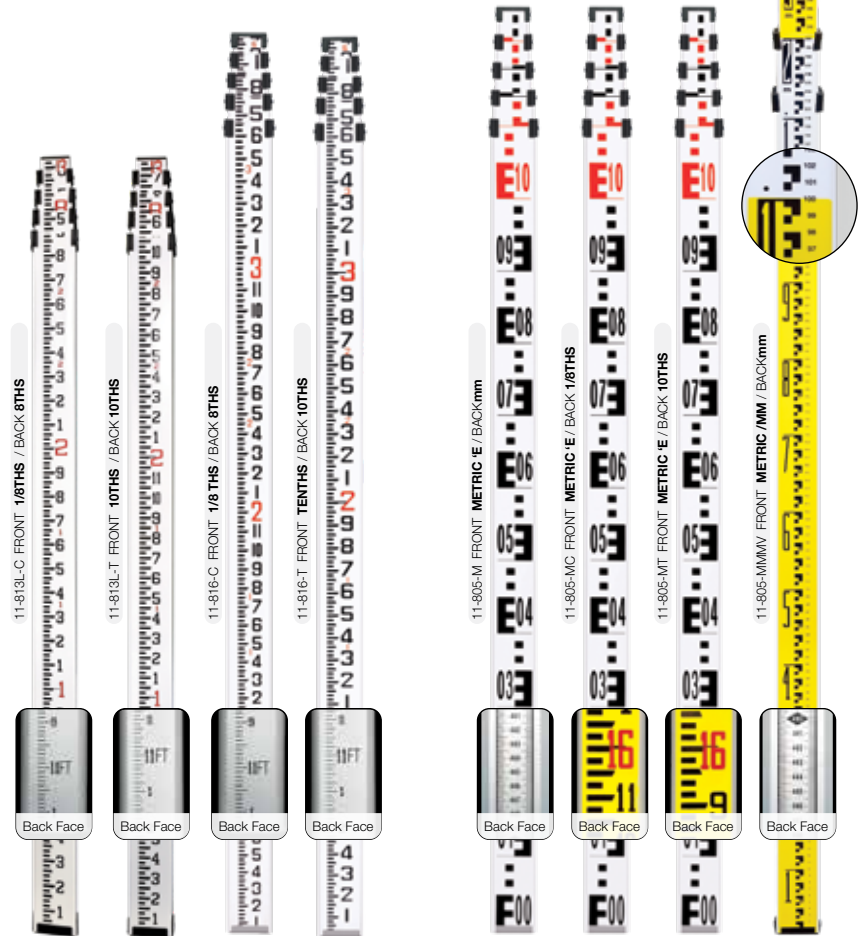
INCLUDES CARRYING CASE

All SitePro 11-8 series aluminum rods include carrying case with accessory pouch and shoulder strap.

sku	length	graduations - front face	graduations - back face	sections	collapsed	wgt
11-813L-C	13-ft	Feet Inches/8ths	Feet Inches/8ths	5	38.6-in (98cm)	3.15lb (1.43kg)
11-813L-T	13-ft	Feet 10ths/100ths	Feet 10ths/100ths	5	38.6-in (98cm)	3.15 lb (1.43kg)
11-816-C	16-ft	Feet Inches	Feet Inches/8ths	5	48-in (123cm)	3.5lb (1.6kg)
11-816-T	16-ft	Feet 10ths/100ths	Feet 10ths/100ths	5	48-in (123cm)	3.5lb (1.6kg)
11-805-BM <small>Not Shown</small>	5m	Barcode Used w/ 25-SDL32 (Pg 11)	Metric 'E'	5	48-in (122cm)	3.5 lb (1.6kg)
11-805-M	5m	Metric 'E'	Metric mm	5	48-in (122cm)	3.5lb (1.6kg)
11-805-MC	5m 16-ft	Metric 'E' Feet Inches	Feet Inches/8ths	5	48-in (122cm)	3.5lb (1.6kg)
11-805-MT	5m 16-ft	Metric 'E' Feet Tenths	Feet 10ths/100ths	5	48-in (122cm)	3.5lb (1.6kg)
11-805-MMMV	5m	Metric, 1/2cm, mm	Metric 1/2cm, mm	5	122cm (48-in)	1.6kg (3.5lb)
11-807-M NEW! <small>Not Shown</small>	7m	Metric 'E'	Metric mm	6	64-in (162cm)	6.6lb (3.0kg)

Note: 11-813L is the standard leveling rod included with SitePro instrument kits.

11-TURLT
5-IN ROD TURNING PLATES

This turning plate is used to improve the accuracy of level runs in soft terrain.

- Leveling plates (or Turtles as they are commonly known) are powder painted heavy cast steel for durability and longevity
- Handle with ground points
- Dome is 1.2-in (3.0cm) half ball; Diameter: 5-in (12.7cm). Height of foot to top of half ball: 2.75-in (7cm); Weight: 6.6lb (3.0kg)
- **Set of Two (2) turning plates**


11-850
SNAP-ON ROD LEVEL

- Fits most aluminum leveling rods, including **11-8 Series**
- Built-in 30-minute vial



APPLICATIONS

- Land surveying
- General construction
- Law enforcement
- Road construction
- Utilities
- Real estate appraisals


PS 401M
1M PROFESSIONAL MEASURING WHEEL, METRIC
PROFESSIONAL **3 YEAR** WARRANTY

All-steel construction with accuracy 1cm measuring and belt-driven counter. Professionals can count on the durable design and accurate, reliable measuring.

- 5-digit belt-driven counter records up to 9,999.9 meters with convenient rest knob
- 1m circumference spoke wheel and wide rubber tire makes it easier to measure accurately on rough terrain & uneven ground
- Wheel brake prevents slipping and allows for easy transport without losing measurement
- Built-in wheel stand keeps wheel upright
- Easy-grip handle folds for compact storage when not in use

sku	wheel dia.	circum.	units	wgt	extended height	collapse height
31-PS401M	0.31m	1m	m	4.3lb (1.95kg)	45.5-in (116cm)	21.5-in (55cm)


APPLICATIONS

- Land Surveying
- General construction
- Law enforcement
- Road construction
- Utilities
- Landscaping


PS 301
SPOKED 3' PROFESSIONAL MEASURING WHEEL
PROFESSIONAL **3 YEAR** WARRANTY

All-steel construction with an 11-1/2-in (3-ft circumference) steel-spoked wheel. **Most popular wheel in performance, durability, and value.**

- 5-digit ratchet-style mechanical counter records up to 99,999 feet with rest knob
- Steel-spoked wheel, wide rubber tire registers single feet click (3-ft per revolution)
- Built-in wheel stand keeps wheel upright
- Wheel brake prevents wheel from slipping and allows for easy transport without losing existing measurement
- Easy-grip handle quickly collapses for compact storage when not in use

sku	wheel dia.	circum.	units	wgt	extended height	collapse height
31-PS301	11-1/2-in	3 ft.	ft	5.3lb (2.4kg)	45.5-in (116cm)	26.5-in (67cm)


APPLICATIONS

- Landscaping
- General construction
- Law enforcement
- Road construction
- Real estate appraisals
- Home remodeling


RS 312/RS 312M
12-1/2-IN/0.318M MEASURING WHEEL
CONTRACTOR **1 YEAR** WARRANTY

Aluminum three-spoke wheel with precision molded wide rubber tire. Affordable, easy to use measuring wheel and more accurate on rough terrain than other wheels on the market.

- 5-digit, easy-read counter
- 3-section aluminum telescopic handle with lever locks collapses for easy storage
- Robust, industry-proven meter housing is durable, heavy-duty poly cast
- Measures in both directions
- Reset switch to set counter to <00000>
- Comfortable, ergonomic pistol grip handle
- Fold-away kick stand keeps wheel upright when not in use

sku	wheel dia.	circum.	units	wgt	extended height	collapse height
31-RS312	12-1/2 in	3 ft.	ft/in	3.2lb (1.5kg)	44.5-in (113cm)	26-in (66cm)
31-RS312M	0.318m	1m	m/dm	3.2lb (1.5kg)	44.5-in (113cm)	26-in (66cm)


APPLICATIONS

- Home remodeling
- Interior design
- Real estate appraisals
- General construction


RS 104
COMPACT 4-IN MEASURING WHEEL, FT/IN
CONTRACTOR **1 YEAR** WARRANTY

Compact measuring wheel is lightweight and durable. Wide, precision molded tire provides accurate measurements on any smooth, hard surface from interior floors to sidewalks.

- 5-digit, easy-read counter measures 9,999 feet, 11 inches
- Heavy-duty 1-ft circumference poly cast six-spoke plastic wheel with rubber tread
- Robust, industry-proven meter housing is durable, heavy-duty poly cast
- Measures in both directions with reset switch to set counter to <00000>
- Easy grip handle with 3-section aluminum telescopic handle with lever locks collapses for easy storage

sku	wheel dia.	circum.	units	wgt	extended height	collapse height
31-RS104	4 in	1 ft.	ft/in	1lb (0.45kg)	38.5-in (98cm)	18.3-in (46.5cm)



SitePro PS-Series measuring wheels are guaranteed with a three (3) year limited warranty. RS-Series measuring wheels are guaranteed with a one (1) year limited warranty. Unless otherwise specified, accessory items include a 90-day limited warranty.

32-SERIES

STEEL TAPES

- Accurate and durable high tempered steel tapes with temperature stability for superior performance.
- Nylon-coated, wear-resistant graduated tape withstands extreme conditions
- Dual-sided graduations
- Easy to rewind with fast reel design (3:1 gear ratio), with folding crank handle
- Tape width is 1/2-in with various graduations available

sku	length	end type*	unit of measure
32-10010B	100-ft	B	10ths/100ths
32-20010B	200-ft	B	10ths/100ths
32-30010B	300-ft	B	10ths/100ths
32-10080B	100-ft	B	Inch/8ths
32-20080B	200-ft	B	Inch/8ths



sku	length	end type*	unit of measure
32-30080B	300-ft	B	Inch/8ths
32-30MA	30m	A	Meter/cm/mm
32-50MA	50m	A	Meter/cm/mm
32-100MA	100m	A	Meter/cm/mm

90-day warranty

34-SERIES

FIBERGLASS TAPES

- Durable and waterproof with non-woven, PVC-coated fiberglass
- Dual-sided graduations
- Easy to rewind with fast reel design (3:1 gear ratio), with folding crank handle
- Tape width is 1/2-in with various graduations available



sku	length	unit of measure
34-Y1001	100-ft	10ths/100ths
34-Y2001	200-ft	10ths/100ths
34-Y3001	300-ft	10ths/100ths
34-Y1008M	100-ft / 30m	Side 1: Inch/8ths; Side 2: Meter/cm/mm
34-Y1001M	100-ft / 30m	Side 1: 10ths/100ths; Side 2: Meter/cm/mm
34-Y1658M	165-ft / 50m	Side 1: Inch/8ths; Side 2: Meter/cm/mm
34-Y1651M	165-ft / 50m	Side 1: 10ths/100ths; Side 2: Meter/cm/mm

sku	length	unit of measure
34-Y1008	100-ft	Inch/8ths
34-Y2008	200-ft	Inch/8ths
34-Y3008	300-ft	Inch/8ths
34-Y3008M	300-ft / 100m	Side 1: Inch/8ths; Side 2: Meter/cm/mm
34-Y30M	30m	Meter/cm/mm
34-Y50M	50m	Meter/cm/mm
34-Y100M	100m	Meter/cm/mm

90-day warranty



ST101

SMART-TRAK™ MAGNETIC LOCATOR

The Smart-TRAK is the smart choice for locating manholes, steel covers, septic systems, corner survey markers, cast iron pipes, iron valves, and re-bar. The ST100-series features a one-handed operation and intuitive controls for ease of use, with pinpoint accuracy and large visual display.

- Precision-crafted ergonomics and balanced design for one-handed operation
- Large LCD screen for visual search results 0-99 numeric indicator with signal strength bar graph and battery level indicator
- High-grade waterproof speaker is water-resistant and dust proof to ensure years of dependable operation
- Robust co-molded housing is water-resistant and dust proof to ensure years of dependable operation
- Waterproof tube (IP67) and tip for locating even in the toughest environments and weather conditions



ST102

SMART-TRAK™ MAGNETIC LOCATOR

The ST102 features patent pending **Smart-Search Technology™** that provides pinpoint accuracy around fences or other large metal objects and intuitive controls for ease of use.

- Precision-crafted superior ergonomics and balanced design for one-handed operation
- Large LCD screen for visual search results, 0-99 numeric indicator with signal strength bar graph, North/South polarity indicator, and battery level indicator
- Four (4) modes of operation: Standard, Erase, Smart+, Smart- for enhanced object discrimination.
- High-grade waterproof speaker is water-resistant and dust proof to ensure years of dependable operation
- Robust co-molded housing is water-resistant and dust proof to ensure years of dependable operation
- Waterproof tube (IP67) and tip for locating even in the toughest environments and weather conditions



SURVEY MARKERS

10-ft (3m)

MANHOLE COVERS

10-ft (3m)

CAST IRON PIPE (4-IN)

10-ft (3m)

SEPTIC TANK HANDLES

3-ft (1.3m)

MAG NAILS

1-ft to 27-ft
(30cm to 82cm)

REBAR

9-ft (2.7m)

★ MADE IN ★
USA
OF GLOBAL COMPONENTS

SmartTrak is proudly made in U.S.A.

	59-ST102	59-ST101
Audio Output:	10Hz frequency tone, increases with magnetic field strength	
Visual Output:	LCD - Numeric 0-99, signal strength bar graph	
Gain (Sensitivity):	6 settings	
Smart-Search	Yes	No
Volume:	4 settings	
Power Indicator:	AC power indicator icon alerts user of potential power lines in the search area	
Modes:	Standard, Erase, Smart +, Smart -	Standard
Power:	Six AA alkaline batteries- 50 hours (intermittent operation)	
Operating Temp:	-13° F to 140° F (-25° C to 60° C)	
Weight:	2.5lb (1.13kg) with batteries	
Length:	42-3/4-in (108.6cm)	
Environment:	IP54 – plastic housing; IP67 – sensor tube to below plastic housing	
Includes:	Carrying case, batteries, user guide	

SmartTrak locators are guaranteed with a seven (7) year limited warranty. Unless otherwise specified, accessory items include a 90-day limited warranty.

THE SMART CHOICE FOR LOCATING FERROUS METALS


17-AX8901
4.5LB WOOD SPLITTING MAUL

- Ideal for splitting wood or driving wedges and stakes
- Fully forged and hardened steel head
- 3-1/2-in geometric blade optimizes penetration to blast tough logs apart
- Forged, heat-treated steel is finished with a rust-resistant coating
- Durable straight-grained Hickory handle
- Hawk length: 8-in; Overall length: 36-in
- Overall weight: 6.5lb (2.9kg)

17-AX3902
1.75LB AXE WITH HICKORY HANDLE

- Compact axe intended for bringing down or cutting up small to medium sized trees
- Fully forged and hardened steel head
- 4-3/8-in geometric blade optimizes penetration
- 13.5-in curved shaft handle is made of durable straight-grained Hickory
- Hawk length: 6-3/8-in (16.2cm)
- Head weight: 1.75lb (0.79kg)
- Overall length: 15.3-in (38.9cm)
- Weighs: 2.4lb (1.1kg)


COLO-SERIES
HEAVY-DUTY MACHETES
SIZES | 18" | 22" | 24" | 28"

The COLO-Series machetes are heavy-duty tempered steel blade for strength and longevity and world's best selling machete with lifetime guarantee¹.

- Colombian made
- 5-in (127mm) ergonomic handle is made of durable engineered wood for better gripping power and longevity
- 2.5mm thick, hot roll tempered high carbon steel blade for strength (49 HRC)
- Sharpenable blade extends through the riveted handle for durability
- Blade lengths: 18-in, 22-in, 24-in, and 28-in

WORLD'S BEST SELLING MACHETE WITH LIFETIME GUARANTEE


COLO22-W
Shown in
Packaging

sku	blade length	handle type	thickness	HRC rating	wgt	sku	blade length	handle type	thickness	HRC rating	wgt
17-COLO18-W*	18-in (45.7cm)	Engineered Wood	2.5mm	49 (+/- 1)	19oz (580g)	17-COLO24-W*	24-1/4-in (61.6cm)	Engineered Wood	2.5mm	49 (+/- 1)	22.0oz (623g)
17-COLO22-W*	22-1/8-in (56.2cm)	Engineered Wood	2.5mm	49 (+/- 1)	20.5oz (580g)	17-COLO28-W	27-15/16-in (71cm)	Engineered Wood	2.5mm	49 (+/- 1)	22.8oz (646g)

*Packaged with sheath available. Call for details.

¹ Guaranteed not to break with normal use. Find more details at dwsitepro.com

CROC-SERIES
MARTINDALE® PRO MACHETES
SIZES | 18" | 22" | 24" | 28"

The CROC-Series Machetes are made from British steel that is hand rolled. Each knife is individually made by a hand rolling process from high quality British carbon steel, which makes the blades strong and durable.

- 2.25mm thick carbon steel blade is strong and durable (45-52 HRC)
- 5-in (127mm) handle is available in solid beech wood or durable plastic
- Turn-back grip handle
- Sharpenable blade extends through the riveted handle for durability
- Blade lengths: 22-in, 24-in, and 28-in

MARTINDALE
REGD. IN ENGLAND




sku	blade length	handle type	thickness	HRC rating	wgt	sku	blade length	handle type	thickness	HRC rating	wgt
17-CROC22-P	21-3/4-in (55.3cm)	Plastic	2.25mm	45-52	18.4oz (522g)	17-CROC24-W	23-3/4-in (60.3cm)	Wood	2.25mm	45-52	21.8oz (618g)
17-CROC22-W	21-3/4-in (55.3cm)	Wood	2.25mm	45-52	20oz (567g)	17-CROC28-W	27-1/2-in (69.9cm)	Wood	2.25mm	45-52	22.4oz (635g)
17-CROC24-P	23-3/4-in (60.3cm)	Plastic	2.25mm	45-52	20oz (567g)						

Each Masterpack contains 36 machetes



17-RF48E

17-RF48E, 17-RF64E
48OZ / 64OZ ENGINEER'S HAMMER

- Made from forged steel head which is hardened and tempered
- Dual machine finished faces that are beveled and fully polished
- Designed for striking spikes and hardened nails, cold chisels, brick chisels, punches, star drills
- Textured yellow fiberglass handle which allows for heavier blows in an environment where there is limited swing
- Ribbed grip to help prevent slipping

17-EWB3-4LB
4LB CLUB/DRILLING HAMMER

Made from forged steel head which is hardened and tempered. Ideal for use with chisels, punches, star drills and hardened nails.

- 10-in handle & shock reduction grip
- Permits heavy blows with limited swing
- Head and handle are forged in one piece and have a black UV coating
- Both faces are fully polished


17-FP18FY
HI-VIS TIP
18-IN FROST PIN

Ideal for breaking up hardened, dried earth as well as frozen ground.

- Made of 1-in diameter high grade tool steel
- 2-in button top and a hardened diamond point
- Weighs 4.0lb (1.8kg)

17-GAD18
HI-VIS TIP
18-IN GAD

Ideally used to break, chip, chisel and pry rocks apart.

- Size: 3/4-in x 1-1/2-in
- Made of high-grade tool steel
- Hardened-steel tip
- Weighs 5.3lb (2.4kg)


17-MCP32-FH
HI-VIS TIP
MANHOLE COVER PICK

Ideal for lifting drain grate and manhole cover safely while protecting your hands from injury as well as back and other injuries.

- Made of 5/8-in hex high grade tool steel
- Hardened steel flat head tip
- Length: 32-in

#G001

PLUMB LINE REEL FOR SURVEYOR

- Allows for simple and fast plumb bob set-up and adjustments
- Designed for use in the surveying field
- Stainless steel wear-guard
- 6-1/2-ft (1.9m) red string



sku	description
15-G001	Gammon Reel® Plumb Line Reel for Surveyors (6-1/2 foot)

#G002

REPLACEMENT STRING

- Refill string is made of high-quality nylon
- Innovative bobbin case keeps string wound and safely stowed
- 24-yd replacement string
- Strong 72-lb test nylon string
- Choice of six (6) available colors



item#	color	length (yards)	length (feet)	length (meters)
15-G002-O	Original Orange	24 yards	72-ft	22m
15-G002-FR	Fluorescent Red	24 yards	72-ft	22m
15-G002-FY	Fluorescent Yellow	24 yards	72-ft	22m

PLUMB BOB SHEATHS

- Heavy duty and riveted for long life
- Made of top grain saddle leather
- Strong metal snap secures bob in sheath



sku	description	designed for
15-1016	Small Plumb Bob Sheath	16oz - 18oz Plumb Bob
15-2432	Large Plumb Bob Sheath	24oz Plumb Bob

#G012

PLUMB LINE REEL FOR CONSTRUCTION

- Allows for simple and fast plumb bob set-up and adjustments
- Designed for use in the construction field
- 12-ft (3.6m) fluorescent-red string
- Power return quickly retracts, eliminating tangled string



sku	description
15-G012	Gammon Reel® Plumb Line Reel for Construction (12-ft)
15-G012B	Gammon Reel® Plumb Line Reel for Construction (12-ft), Black

PLUMB BOBS

SitePro plumb bobs are precision machined for perfect balance and treated for a lasting finish.

- Brass construction
- Steel ASA screw cap allows storage for extra point
- Includes a hardened steel point with ASA thread (**stored inside cap**)



sku	wgt	sku	wgt
15-016	16oz (454g)	15-024	24oz (680g)
15-018	18oz (510g)	15-032	32oz (907g)

CONTRACTOR KITS

GAMMON REEL KIT W/ PLUMB BOB

The Gammon Reel kits are ideal for the contractor. Leather sheath keeps your plumb bob and Gammon Reel handy at your side.

- Riveted and stitched in heavy duty nylon thread for extra strength and durability
- Snap button straps secure plumb bob and Gammon Reel in pockets
- Slits for up to 3-in belt insertion
- Gammon Reel and plumb bob included




sku	plumb bob	plumb reel
15-1021GR16KIT	16oz (#15-016)	12-ft (#15-G012)
15-1021GR18KIT	18oz (#15-018)	12-ft (#15-G012)

SURVEY BOOKS

The SitePro survey books are made of quality white paper with extra-stiff hard cover book. Hardback orange cover protected by a water barrier with blind embossing.

- 80 sheets (160 pages)
- Ruled light blue with red vertical lines
- Size: 4-1/2-in x 7-1/4-in
- Reference tables/diagrams in back section

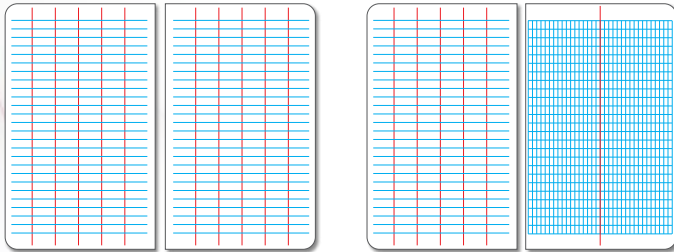

17-325-L LEVEL BOOK

17-350-T FIELD BOOK



sku	description	left page	right page	#pages
17-325-L	Level Book	Six (6) Vertical Columns	Six (6) Vertical Columns	160
17-350-T	Field Book	Six (6) Vertical Columns	8 x 4 Grid	160

MECHANICAL PENCILS NEW!

The MP200-series mechanical pencils are used for precise drafting, drawing, sketching, and writing. Leads can be used on paper or vellum.

- Aluminum pencil with knurled or chiseled grip design for firm comfortable grip, giving greater control and precision when using
- Perfectly balanced and weighted for maximum comfort and control when writing and drawing
- HB grade graphite lead provide crisp, sharp lines
- Push cap allows for easy dispensing of lead

sku	lead size	includes
17-MP205	0.5mm	Two (2) 0.5mm Pencils; Pack of Black Replacement Leads
17-MP207	0.7mm	Two (2) 0.5mm Pencils; Pack of Black Replacement Leads
17-MP209	0.9mm	Two (2) 0.5mm Pencils; Pack of Black Replacement Leads
17-MP220	2.0mm	Two (2) 2.0mm Pencils; Pack of Black and Pack of Mixed Color Replacement Leads



207

GIANT CONCRETE SCRIBE

- Ideal for fine line marking on metal and stone
- Machined aluminum handles with diamond knurling for comfortable and firm grip
- Precision ground carbide scribe tip
- Pocket clip and protective cap



sku	description	tip
17-207	7-1/2 in Concrete Scribe, with Replaceable Tip	Carbide
17-201-10	Replacement Tip (Pack of 10)	Carbide

PM220-SERIES

DUAL-TIP PERMANENT MARKERS



The SitePro PM220-Series is a 6-in durable poly barrel permanent marker with a dual-tip design. It features a heavy-duty chisel tip on one end and a fine tip on the other, both with reinforced nibs.

- Ideal for marking on wood, metal, and more
- Quick-drying, fade-resistant, non-toxic ink
- Leak-proof, 6-in high strength poly barrel
- Sold in **box of 12 markers** each



Side One
Large (7mm) Chisel Tip



Side Two
Fine Tip



sku	description	ink color
17-PM220-B	Permanent Marker for Professionals	Black
17-PM220-R	Permanent Marker for Professionals	Red

ALUMINUM TREE TAGS NEW!

1-1/4-IN ROUND ALUMINUM TREE TAGS

Designed for easy marking on trees that need to be protected, cut, or treated, as well as simply helping identify the species of each tree. Made from aluminum, these tree tags are long-lasting and weather withstanding in extreme conditions.

- 1-1/4-in (32mm) diameter
- Laser engraved numbers to ensure it never fades
- Commonly used in states with municipal tree ordinances



item	numbers
19-TAG100-AR	001-100
19-TAGPK1000-AR	001-1000

17-651

TRANSIT COMPASS


- Graduated circle for optimal versatility
- Damped for superior stability
- Includes velvet lined, belt-loop case for storage and transport


17-401, 17-411

MARKING PINS

- 3/16-in (4.8mm) spring steel, heat-treated
- Powder-painted

Leather Quiver
available on
page 39



sku	description	color
17-401	14-in (35.5cm) Marking Pins - Includes 11 pins	Red and white, alternating at each 1-in (25.4mm)
17-411	Carrying Ring for Marking Pins - Eye with slip hook locks ring to secure pins	White

13-642

TOPOGRAPHIC ABNEY LEVEL

- Dual interchangeable arcs: one arc graduated in percentage of grade/degrees (bi-directional, 0° to 60°) and one graduated in percentage of grade/topographic scale
- Square sighting tube with internal focusing telescope
- Length: 6-3/8-in (16.1cm)


13-632

6-IN BRASS HAND LEVEL

- 2-power magnification
- 6-in (15.2cm) long draw eyepiece extends to 7-1/2 in (19.1cm)
- Internally mounted bubble assembly


13-590

2.5X HAND LEVEL

- 2.5-power magnification
- Convenient pocket-sized tool for establishing a level line of sight
- Ideal for preliminary survey and simple distance estimation
- Stadia and vertical lines



- Length: 5-in (12.7cm)
- Includes carrying case

43-D620

2X SIGHTING HAND LEVEL

- Ideal for preliminary survey and simple distance estimation
- Sturdy impact-resistant aluminum body and easy-to-read protected vial w/ pocket clip



- 2-power fixed magnification


700-SERIES

SURVEY MARKERS

- Cast from solid brass with a non-glare finish
- Ideal for boundary or general survey markers
- Shank is ribbed to prevent turning or loosening
- Available in both flat and domed head design



sku	length	head type	sku	length	head type
19-700	1-3/8 in (34.9mm)	Flat	19-706	2-1/2 in (63.5mm)	Domed
19-701	2-in (50.8mm)	Flat	19-707	3-in (76.2mm)	Domed
19-702	2-1/2 in (63.5mm)	Flat			
19-703	3-in (76.2mm)	Flat			
19-705	2-in (50.8mm)	Domed			


750-SERIES

HI-MAGNETIC MASONRY NAILS

- 3x easier to locate than other nails on the market - most preferred by professionals
- Zinc-plated to resist corrosion
- Large targeted center point
- 6 sizes lengths from 2-1/2-in to 3/4-in



sku	shank length	shank diameter	head diameter	ct per box
20-751	3/4-in (19.05mm)	1/8-in (3.18mm)	5/16-in	100
20-752	1-in (25.4mm)	3/16-in (4.76mm)	3/8-in	100
20-753	1-1/4-in (31.75mm)	3/16-in (4.76mm)	1/2-in	100
20-754	1-1/2-in (38.1mm)	1/4-in (6.35mm)	9/16-in	100
20-755	2-in (50.8mm)	1/4-in (6.35mm)	9/16-in	100
20-756	2-1/2-in (63.5mm)	1/4-in (6.35mm)	9/16-in	100

19-750

3/4-IN STAKE TACKS, ZINC-PLATED

- New and improved zinc-plated surveyor tacks
- 1lb (0.45kg) per box, approximately 750 tacks per box
- 3/4-in length



sku	description
19-750	3/4-in (19mm) Stake Tacks, Zinc-Plated
19-TBALL750	3-in (76mm) Rubber Sponge Tack Ball w/ Loop

17-100

4-DIGIT TALLY COUNTER

- Four-digit mechanical counter counts up to 9999, with reset to zero and features an audible click
- Easy reading digits with protective window


17-911

DOUBLE RIGHT ANGLE PRISM

- Large field of view and foresight viewing glass
- Center lens permits foresight viewing
- Step off angles of 90° and 180°
- Includes carrying case



STAKE FLAGS STEEL WIRE FLAGS


Ideal to ensure consistent communication and long-lasting visibility for utility construction, line locating, forestry, and landscaping.

- Steel wire constructed of rust-resistant alloy steel
- Flags made of long-lasting PVC material with high-visibility ink color
- Tear-resistant for high performance to -20°F
- Flag is glued to staff for durability
- **Packaged in Box of 1000 Flags** (10 bundles of 100 each per box)



2-IN X 3-IN FLAGS **NEW!**

sku	flag size	length	color	flags in box	box gross wgt
19-F2321-B	2-in x 3-in	21-in	Blue	1000	23lbs (10.4kg)
19-F2321-G	2-in x 3-in	21-in	Green	1000	23lbs (10.4kg)
19-F2321-GL	2-in x 3-in	21-in	Glo-Lime	1000	23lbs (10.4kg)
19-F2321-GO	2-in x 3-in	21-in	Glo-Orange	1000	23lbs (10.4kg)
19-F2321-GP	2-in x 3-in	21-in	Glo-Pink	1000	23lbs (10.4kg)
19-F2321-R	2-in x 3-in	21-in	Red	1000	23lbs (10.4kg)
19-F2321-W	2-in x 3-in	21-in	White	1000	23lbs (10.4kg)
19-F2321-Y	2-in x 3-in	21-in	Yellow	1000	23lbs (10.4kg)



LONG-LASTING

Our Stake Flags are constructed with rust-resistant alloy steel as well as a PVC material flag that is securely glued to the wire.



4-IN X 5-IN FLAGS

sku	flag size	length	color	flags in box	box gross wgt
19-F4521-B	4-in x 5-in	21-in	Blue	1000	23lbs (10.4kg)
19-F4521-G	4-in x 5-in	21-in	Green	1000	23lbs (10.4kg)
19-F4521-GL	4-in x 5-in	21-in	Glo-Lime	1000	23lbs (10.4kg)
19-F4521-GO	4-in x 5-in	21-in	Glo-Orange	1000	23lbs (10.4kg)
19-F4521-GP	4-in x 5-in	21-in	Glo-Pink	1000	23lbs (10.4kg)
19-F4521-R	4-in x 5-in	21-in	Red	1000	23lbs (10.4kg)
19-F4521-W	4-in x 5-in	21-in	White	1000	23lbs (10.4kg)
19-F4521-Y	4-in x 5-in	21-in	Yellow	1000	23lbs (10.4kg)
19-F4530-B	4-in x 5-in	30-in	Blue	1000	31lbs (14.0kg)
19-F4530-G	4-in x 5-in	30-in	Green	1000	31lbs (14.0kg)
19-F4530-GL	4-in x 5-in	30-in	Glo-Lime	1000	31lbs (14.0kg)
19-F4530-GO	4-in x 5-in	30-in	Glo-Orange	1000	31lbs (14.0kg)
19-F4530-GP	4-in x 5-in	30-in	Glo-Pink	1000	31lbs (14.0kg)
19-F4530-R	4-in x 5-in	30-in	Red	1000	31lbs (14.0kg)
19-F4530-W	4-in x 5-in	30-in	White	1000	31lbs (14.0kg)
19-F4530-Y	4-in x 5-in	30-in	Yellow	1000	31lbs (14.0kg)

FTP-SERIES

NEW COLORS!

SALAMANDER® FLAGGING TAPE, 4MIL

- Bright, long-lasting high-visibility glo-colors
- -30°F temperature resistance
- Smooth, bright, and reflective appearance
- 4.0 mil thickness
- Environmental protection material
- **Packaged in box of 12 rolls**



GLO-COLOR, 150-FT

sku	ribbon size	color	ribbon length
19-FTP-LG	1-3/16-in (30mm)	Glo-Lime/Green	150-ft (45m)
19-FTP-OG	1-3/16-in (30mm)	Glo-Orange	150-ft (45m)
19-FTP-PG	1-3/16-in (30mm)	Glo-Pink	150-ft (45m)
19-FTP-RG	1-3/16-in (30mm)	Glo-Red	150-ft (45m)
19-FTP-YG	1-3/16-in (30mm)	Glo-Yellow	150-ft (45m)



THE SALAMANDER® BRAND

Our Salamander® Series Roll Flagging Tape is embossed with our Salamander logo throughout the roll.



STANDARD COLOR

sku	ribbon size	color	ribbon length
19-FTP-B	1-3/16-in (30mm)	Blue	150-ft (45m)
19-FTP-G	1-3/16-in (30mm)	Green	150-ft (45m)
19-FTP-PP	1-3/16-in (30mm)	Purple	150-ft (45m)
19-FTP-W	1-3/16-in (30mm)	White	150-ft (45m)

SBT-SERIES
NEW!
NYLON BRAIDED MASON TWINE

Ideal for measurement and alignment in foundation layouts, boundary marking, brick alignment, leveling, creating reference lines, temporary fencing, and more.

- Durable braided nylon twine
- Special coating makes the twine stiffer and more abrasion-resistant
- Available colors: **Glo-Green, Glo-Orange, Glo-Pink, Glo-Yellow, Black & White**
- Available lengths: 250-ft, 500-ft, 1000-ft



sku	length	color
19-SBT250-BW	250-ft	Black-White
19-SBT500-BW	500-ft	Black-White
19-SBT1000-BW	1000-ft	Black-White
19-SBT250-FP	250-ft	Flo-Pink
19-SBT500-FP	500-ft	Flo-Pink
19-SBT1000-FP	1000-ft	Flo-Pink
19-SBT250-FO	250-ft	Flo-Orange
19-SBT500-FO	500-ft	Flo-Orange


sku	length	color
19-SBT1000-FO	1000-ft	Flo-Orange
19-SBT250-FG	250-ft	Flo-Green
19-SBT500-FG	500-ft	Flo-Green
19-SBT1000-FG	1000-ft	Flo-Green
19-SBT250-FY	250-ft	Flo-Yellow
19-SBT500-FY	500-ft	Flo-Yellow
19-SBT1000-FY	1000-ft	Flo-Yellow


MASON TWINE WITH REEL HOLDER

- Reel holder (#19-SBT-RH) available with 250-ft & 500-ft twine or sold separately
- Durable handle and quick setup reel holder

sku	length	color
19-SBT250-BW-RH	250-ft	Black-White
19-SBT500-BW-RH	500-ft	Black-White
19-SBT250-FP-RH	250-ft	Flo-Pink
19-SBT500-FP-RH	500-ft	Flo-Pink
19-SBT250-FO-RH	250-ft	Flo-Orange

sku	length	color
19-SBT500-FO-RH	500-ft	Flo-Orange
19-SBT250-FG-RH	250-ft	Flo-Green
19-SBT500-FG-RH	500-ft	Flo-Green
19-SBT250-FY-RH	250-ft	Flo-Yellow
19-SBT500-FY-RH	500-ft	Flo-Yellow


**SPECIAL
COATING**

Our Mason Twine is not only braided to ensure durability, but it also has a special coating to make the twine stiffer and more abrasion-resistant

SDW6-SERIES
6-IN STAKE WISKER MARKERS


Ideal for quick, easy identification for survey and construction sites, reference points, stake markers, underground utilities, and so much more.

- Available in bright APWA and international utility code colors: blue, green, glo-orange, glo-pink, red, white, yellow.
- Highly visible, durable, and cost-effective
- Installs quickly and easily, fits all wooden stakes and 60-penny nails
- **Packaged in Box of 500 Wiskers** (20 bundles of 25 wiskers each per box)



sku	height	color	qty
19-SDW6-B	6-in (150mm)	Blue	500
19-SDW6-G	6-in (150mm)	Green	500
19-SDW6-FO	6-in (150mm)	Glo-Orange	500
19-SDW6-FP	6-in (150mm)	Glo-Pink	500
19-SDW6-R	6-in (150mm)	Red	500
19-SDW6-W	6-in (150mm)	White	500
19-SDW6-Y	6-in (150mm)	Yellow	500


EASY TO USE

Attach Wisker™ onto the center top edge of the stake w/ the loop of the bracket overlapping the stake

Strike the top of bracket w/ a hammer to drive the wisker into stake

MACHETE SHEATHS

Leather sheath keeps your machete safe guarded and handy, protects machete while carrying on your side or during transport. Heavy-duty formed leather is side-stitched with durable nylon thread and then riveted at strain points. Built for quality, strength, and longevity.

- Made of heavy-duty top grain leather for durability and maximum life
- Double side-stitched and riveted at strain points
- Durable, reinforced 1-1/2-in wide belt loop fits up to 3-in belt
- Available for 18-in, 22-in, 24-in, and 28-in machetes



sku	designed for	actual length	fits blade width	wgt
17-LS18	18-in machete	17-1/2-in	2-1/2-in	0.45lb (204g)
17-LS22	22-in machete	21-1/2-in	2-1/2-in	0.52lb (235g)

sku	designed for	actual length	fits blade width	wgt
17-LS24	24-in machete	23-1/2-in	2-1/2-in	0.61lb (276g)
17-LS28	28-in machete	27-1/2-in	2-1/2-in	0.73lb (331g)

1016/2432

PLUMB BOB SHEATHS

- Keeps your plumb bob handy at your side
- Made of top grain leather for durability and maximum life
- Tapered pocket with snap-button strap fits and secures plumb bob
- Riveted and stitched in heavy-duty nylon thread for extra durability
- Slits to fit 2-in belt insertion



sku	designed for
15-1016	16 to 18 ounce plumb bob
15-2432	24 ounce plumb bob

51-10218G

SHEATH FOR GAMMON REEL® & PLUMB BOB

Heavy-duty leather scabbard with stitched and riveted pockets provides snug and convenient pockets with cut-out hole on front for easy access.

- Holds 16-18oz plumb bob and Gammon Reel® or tape
- Riveted and stitched in heavy-duty nylon thread for extra strength and durability
- Snap button straps secure plumb bob and Gammon Reel in pockets
- Slits for up to 3-in belt insertion



*Plumb bob and Gammon Reel not included

17-406

LEATHER QUIVER FOR MARKING PINS

Leather quiver keeps your survey marking pins handy at your side. Heavy-duty formed leather is side-stitched with durable nylon thread and then riveted at strain points. Built for quality, strength, and maximum life.

- Holds up to twelve (12) 14-in marking pins
- Side-stitched and riveted at strain points, reinforced bottom
- Durable, reinforced 1-1/2-in wide belt loop fits up to 3-in belt



51-10109

PRO CONTRACTOR'S TOOL POUCH

- Made of top grain saddle leather
- Nine (9) pouches stores field book, 16oz. plumb bob, marking pins, folding rule, scribe, survey tacks and nails, and pencils.
- Riveted and stitched in heavy-duty nylon thread for extra strength and durability
- Tunnel loop saddle fits up to 2-1/2-in belt
- Tapered pocket with snap-button strap secures plumb bob
- Easy access front pocket snap-lid for tacks or nails



51-10107

7-POCKET SURVEYOR'S TOOL POUCH

Surveyor's tool pouch is made of top grain saddle leather and features seven (7) pockets. Stores field book, plumb bob marking pins, folding rule, scribe, survey tacks and nails, and pencils.

- Riveted and stitched in heavy-duty nylon thread for extra strength and reinforcement
- Tunnel loop saddle can fit up to a 2-1/2-in belt
- Tapered pocket with snap-button strap secures up to 16oz plumb bob
- Easy access front pocket snap-lid for tacks or nails



*Accessories shown in pouch are not included

Our product line of SiteMAX™ bags are constructed of high strength Ballistic nylon-fiber material with heavy-duty hardware and reinforcement stitching. The internal seams of the SiteMAX Ballistic bags are bound to prevent fraying which provide maximum toughness and durability. Select from the many styles designed to fit your needs in the field or on the jobsite.

21-B81520

BALLISTIC TRIPOD BAG

- Designed to hold most major brands of aluminum or wood tripods
- Constructed of high strength ballistic nylon-fiber material with **inner reinforcement lining**
- High-grade abrasion-resistant material on bottom and 8-in (20.5cm) up the side is tough and rugged in wet, dry, and extreme conditions
- Unique double draw string design for quick closure of bag once tripod is inside
- Three (3) large pockets made of tough nylon fiber material with pull tab to store other gear
- Heavy-duty adjustable padded shoulder strap and hand loop for easy handling and carry



21-B248

48-IN BALLISTIC LATH BAG

- Hold and carry 48-in (122cm) laths
- Constructed of high strength ballistic nylon-fiber material with inner lining
- High-grade abrasion-resistant material on bottom and 8-in (20.5cm) up the side is tough and rugged in wet, dry, and extreme conditions - with moisture control airlit grommet
- Three (3) large 8-in W x 10-in D (20.5cm x 25.4cm), pleated outside pockets for markers, paint, and other supplies
- Heavy-duty adjustable padded shoulder strap and hand loop for easy handling and carry
- Overall size: 45-in T x 8-in W (114.5cm x 20.5cm)
- Wgt: 2.9lb (1.3kg)



21-B236

36-IN BALLISTIC LATH BAG

- Hold and carry 36-in (92cm) lath
- Constructed of high strength ballistic nylon-fiber material with inner lining
- High-grade abrasion-resistant material on bottom and 8-in (20.5cm) up the side is tough and rugged in wet, dry, and extreme conditions - with airlit grommet
- Three (3) large 8-in W x 10-in D (20.5cm x 25.4cm), pleated outside pockets with pull tab for markers, paint, and other supplies
- Heavy-duty adjustable padded shoulder strap and hand loop for easy handling and carry
- Overall size: 34-in Tall x 8-in Wide (86.4cm x 20.5cm)
- Wgt: 2.45lb (1.1kg)



21-B758

24-IN BALLISTIC STAKE BAG

- Designed to hold 24-in (60cm) wood survey stakes or iron rebar
- Constructed of high strength, ballistic nylon-fiber material with inner lining
- High-grade abrasion-resistant material on bottom and back side is tough and rugged in wet, dry, and extreme conditions - with airlit grommet
- Heavy-duty adjustable padded shoulder strap and hand loop
- Five (5) pockets: three (3) large 8-in W x 10-in D (20.5cm x 25.4cm), pleated front outside pockets for markers, paint, and other supplies; two (2) 6.5-in W x 9-in D (2.6cm x 22.9cm) pleated side pockets
- Overall inner size: 24-in L x 10-in W x 14-in H (61 x 25.4 x 35.6cm). Wgt: 2.95lb (1.34kg)



21-B718

18-IN BALLISTIC STAKE BAG

- Designed to hold 18-in (46cm) wood survey stakes or iron rebar
- Constructed of high strength, ballistic nylon-fiber material with inner lining
- High-grade abrasion-resistant material on bottom and back side is tough and rugged in wet, dry, and extreme conditions - with moisture control airlit grommet
- Heavy-duty adjustable padded shoulder strap and hand loop
- Five (5) pockets with three (3) large 6-in W x 10-in D (15.3 x 25.4cm), pleated front outside pockets for markers, paint, and other supplies
- Overall inner size: 19-in L x 11-in W x 14-in H (48.5 x 28.0 x 35.6cm)
- Wgt: 2.55lb (1.16kg)



21-BPC50P

BALLISTIC SPRAY CAN HOLDER WITH POCKETS

- Designed to hold a standard size marking paint can at your hip for easy access
- Pockets to hold a folding rule, marker pens, pencils
- Constructed of high strength ballistic nylon-fiber material for durability and longevity
- Webbed belt loop fits a 2.25-in wide belt
- Webbing strap with velcro to safely hold paint can in place
- Overall, inside: 7.5-in x 3-in (19.1 x 7.6cm). Wgt: 0.25lb (0.12kg)



21-BPC50

BALLISTIC SPRAY CAN HOLDER

- Designed to hold a standard size marking paint can
- Webbed belt loop fits a 2.25-in wide belt
- Constructed of high strength ballistic nylon-fiber material for durability and longevity
- Overall, inside: 7-in x 3-in (18cm x 7.6cm). Wgt: 0.10lb (0.05kg)



21-236

36-IN REINFORCED LATH BAG

- Hold and carry 36-in (92cm) lath
- High strength fiber material with tough, waterproof and abrasion-resistant material at the bottom and 6-in (15cm) up the side
- 8-in (20cm) diameter bucket style bottom
- Three (3) large, pleated outside pockets for markers, paint, and other materials
- Heavy-duty adjustable shoulder strap and hand loop
- Overall inside: 8-in x 33.5-in (20cm x 84cm)
- Color: Hi-vis orange


21-248

48-IN REINFORCED LATH BAG

- Hold and carry 48-in (122cm) lath
- High strength fiber material with tough, waterproof and abrasion-resistant material at the bottom and 6-in (15cm) up the side
- 8-in (20cm) diameter bucket style bottom
- Three (3) large, pleated outside pockets for markers, paint, and other materials
- Heavy-duty adjustable shoulder strap and hand loop
- Overall inside: 8-in x 45-in (20cm x 114cm)
- Color: Hi-vis orange



HEAVY-DUTY DESIGNS FOR PURPOSE, DURABILITY, AND STYLE

21-28102

38-IN LATH BAG, HEAVY-DUTY WITH HANDLES

- Constructed with high strength fiber material; tough with heavy-duty stitching and reinforced bottom
- Designed to hold up to 50 lath or rebar
- Bottom of bag features tough, waterproof and abrasion-resistant composite material
- 7 large pockets and slots: One (1) large pocket, two (2) small pockets, one (1) can holder, 3 small market slots
- Heavy-duty adjustable padded shoulder strap and two hand loops
- Overall dimensions: 9-in x 38-in (23cm x 97cm)
- Color: Hi-vis orange


21-758

24-IN STAKE BAG, HEAVY-DUTY

- Designed to hold 24-in (60cm) wood survey stakes or iron rebar
- Five (5) large pockets made of tough nylon fiber material to store flagging tape, nails, or other gear
- Constructed with high strength fiber material; tough with heavy-duty stitching and reinforced bottom
- Bottom of bag features tough, waterproof and abrasion-resistant composite material
- Heavy-duty adjustable shoulder strap for carrying
- Grommet drain holes are positioned at both ends of bag


21-718

18-IN STAKE BAG, HEAVY-DUTY

- Designed to hold 18-in wood survey stakes or iron rebar
- Constructed with high strength fiber material; tough with heavy-duty stitching and reinforced bottom
- Bottom of bag features tough, waterproof and abrasion-resistant composite material
- Heavy-duty adjustable shoulder strap for carrying
- Five (5) large pockets made of tough nylon fiber material to store flagging tape, nails, or other gear
- Grommet drain holes are positioned at both ends of bag



21-PC50
SPRAY CAN HOLDER

- Holds a paint can on hip for easy access; designed to carry a standard size spray-paint can
- Heavy-duty nylon construction with nylon webbing belt loop that fits up to a 2-in wide belt
- Color: Hi-vis orange
- Wgt: 0.14lb (0.06kg)


21-PC50P
PAINT CAN HOLDER WITH POCKETS

- Paint can pocket lined with reinforcement for easy in and out of can and velco safety strap
- Designed with pockets to hold a folding rule (which includes a Velcro strap), marker pens, pencils, and other items
- High-strength fiber material that is tough and abrasion-resistant
- Heavy-duty belt loop with reinforced stitching that fits up to a 2-in wide belt


21-2581
JUMBO PADDED BAG

- Ideal for triple prisms and prism targets or tribrach kits
- Thick padded interior and heavy-duty zipper
- Inside dimensions: 10-in x 9.5-in x 3-in (25.4cm x 24.1cm x 7.7cm)
- Outside dimensions: 12-in x 12.5-in x 8-in (30.5cm x 32cm x 20.3cm)
- Outside pocket
- Weighs 1.06lb (0.48kg)


21-2547
TOP LOADING FIELD CASE FOR TOTAL STATION, HEAVY-DUTY

This heavy-duty padded field case fits most total stations. Designed as a backpack and constructed with water-resistant nylon.

- Made from high-strength nylon with heavy-duty stitching and reinforced bottom
- Top-loading design with 2-in thick foam padding on all sides
- Waterproof, abrasion-resistant composite bottom for extra protection
- Internal dimensions: 14.0 x 9.0 x 7.0-in (36 x 23 x 18 cm)
- Weight: 6.75lb (3.1kg)


21-2542
LARGE PADDED BAG


- Extra thick padding on all inner sides for protection of your device
- Suitable for use with triple tilting prism
- Carrying strap and heavy-duty zipper
- Inside dimensions: 9-in x 7-in x 2-in (22.9cm x 17.8cm x 5.1cm)
- Weighs 0.5lb (0.34kg)


OTHER CASES

sku	description	designed for
21-1200	Padded bag, tribrach	05-1200 Series tribrachs
21-2010	Padded bag, prism	03-2010M, 03-1010 prisms


21-TSRC-G
SIZE | ONE SIZE FITS MOST
RAIN COVER FOR TOTAL STATION

- Designed for robotic total stations with waterproof material keeps your instrument dry
- Extended scope hood can be quickly and easily positioned over the scope of instrument
- Clear polypanel on backside to view LCD display
- Dimensions: 9-in x 9-in x 14-in (230 x 230 x 340mm)

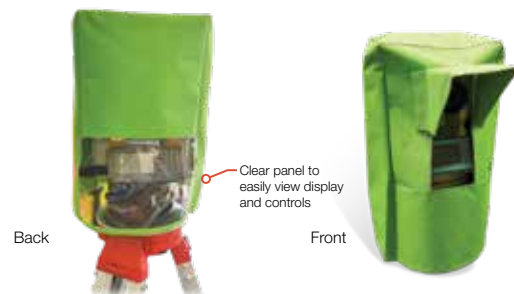
SNC5500 / SNC5600
SIZE | ONE SIZE FITS MOST
SAFETY NECK SHADE FOR HARD HATS

- One size fits most hard hats with an elastic band to secure onto hat
- Two colors available with 3/4-in (19mm) grey reflective stripes with contrast color binding

sku	sizes available	color	reflective stripping
23-SNC5500	One Size Fits Most	Flo-Lime	3/4-in (19mm) reflective strip with orange contrast
23-SNC5600	One Size Fits Most	Flo-Orange	3/4-in (19mm) reflective strip with yellow contrast



23-750-FL
CLASS 2- ANSI/ISEA

PREMIUM CLASS 2 SURVEYOR'S VEST

SIZES | S M L XL 2X 3X

- Made from durable, heavy-duty ANSI/ISEA compliant polyester and polyester mesh
- 2-in (51mm) thick reflective strip with 4-in (102mm) wide flo-orange color
- Multiple outside pockets, two inside pockets, dual mic clips, and back pouch for additional storage
- Solid polyester front with mesh back for ultra-cool comfort
- Padded collar on the inside



Back View



Lower inside zippered pockets with load-bearing strap for notebook or iPad®



Back pouch with dual heavy-duty zipper for additional storage of documents or blueprints




Plastic drawstring toggle spring to adjust waist area for desired fit



Back is made of polyester mesh for climate controlled comfort

SIZING CHART FOR 750-SERIES

	S	M	L	XL	2X	3X
CHEST WIDTH MEASUREMENT	36 to 38-in	40 to 42-in	44 to 46-in	48 to 50-in	52 to 54-in	56 to 58-in
LENGTH FROM HIGH POINT OF SHOULDER	26-in	26.5-in	27.75-in	28.5-in	28.5-in	29.5-in



Length

Chest

51-15091

DRYWALLER POUCH W/BELT

SIZES | M L XL XXL

- Pockets/tool holders: 7
- Front and Side mounted hammer ring holder
- Protective leather sheath for saw pocket
- Main inner pouch has inner loops for organization

- Leather 3-in ranger style work belt with 2-in wide tongue, constructed with high quality bridle leather with nickel plated steel roller buckle


**2 YEAR
WARRANTY**
51-15091-M

Fits waist size 33 to 35-in

51-15091-L

Fits waist size 36 to 39-in

51-15091-XL

Fits waist size 40 to 44-in

51-15091-XXL

Fits waist size 45 to 50-in

51-15092

PRO DRYWALLER SET

SIZES | M L XL XXL

- Pockets/tool holders: 17
- Front and Side mounted hammer ring holder
- Protective leather sheath for saw pocket

- 3-in ranger style work belt with 2-in wide tongue, constructed with high quality bridle leather with nickel plated steel roller buckle


**2 YEAR
WARRANTY**
51-15092-M

Fits waist size 33 to 35-in

51-15092-L

Fits waist size 36 to 39-in

51-15092-XL

Fits waist size 40 to 44-in

51-15092-XXL

Fits waist size 45 to 50-in

51-18080

HYBRID PRO FRAMER SET

SIZES | M L XL XXL

The SITEGEAR 18080 is built tough, durable and lightweight to meet both the comfort and needs of professionals on any jobsite.

- Crafted from premium heavy-duty top grain leather and 1680d ballistic/nylon fabric
- Easy carry removeable handle design for adjustments and transport
- 2.5-in wide work belt featuring a new tongue roller buckle
- Leather holders for hammer, tape, combination square, and pry bar
- Pouches made with double-lined, ballistic nylon material and gusset design for easy access and storage of tools



2
YEAR
WARRANTY

51-18080-M

Fits waist size 33 to 35-in

51-18080-L

Fits waist size 36 to 39-in

51-18080-XL

Fits waist size 40 to 44-in

51-18080-XXL

Fits waist size 45 to 50-in



Tough double-lined ballistic material with gusset design front pockets that allow for easy access to nails and fasteners



Riveted and stitched with heavy-duty nylon thread for extra strength and durability



Easy access tape holder for quick access while doing projects (holds up to a 35-ft tape)

51-18080S

HYBRID PRO FRAMER SET WITH SUSPENDERS

SIZES | M L XL XXL

The SITEGEAR 18080S is a complete framer rig set with hybrid suspenders and tool belt for superior weight distribution and all-day comfort during any task.

- Crafted from premium heavy-duty, top-grain leather and 1680d ballistic/nylon fabric
- 2.5-in wide work belt featuring a new tongue roller buckle to ensure belt is secure
- D-Ring to easily hang and store entire rig
- Comfortable padded and contoured yoke



2
YEAR
WARRANTY

51-18080S-M

Fits waist size 33 to 35-in

51-18080S-L

Fits waist size 36 to 39-in

51-18080S-XL

Fits waist size 40 to 44-in

51-18080S-XXL

Fits waist size 45 to 50-in

51-15089

7-POUCH PRO FRAMER SET

POCKETS | 23

The SITEGEAR 15089 is designed with heavy-duty leather and is reinforced with heavy-duty nylon thread and rivets for extra strength and durability.

- Gusset design front pouches for easy access to nails and fasteners
- Riveted and stitched in heavy-duty nylon thread for extra strength and durability
- Left side fastener has one extra bag for maximum fastener capacity
- Tape holder with cut-out hole on front for quick and easy access (holds up to a 35-ft tape)
- Pockets/tool holders: 23
- Weight: 6.0lb


51-15089-M

Fits waist size 33 to 35-in

51-15089-L

Fits waist size 36 to 39-in

51-15089-XL

Fits waist size 40 to 44-in

51-15089-XXL

Fits waist size 45 to 50-in



Gusset design front pouches for easy access to nails and fasteners



Riveted and stitched in heavy-duty nylon thread for extra strength and durability



Tape holder with cut-out hole on front for quick and easy access (holds up to a 35-ft tape)

51-15089S

7-POUCH PRO TOOL BELT RIG

The SITEGEAR 15089S is a complete framer rig set with suspenders. Designed with premium top-grain leather, crafted with durable heavy-duty nylon thread and rivets for extra strength and durability.

POCKETS | 23

- Gusset design front pouches for easy access to nails and fasteners
- Traditional heavy-duty leather suspenders, hand crafted from bridle leather with large shoulder pads
- Heavy-duty spring clips snap to work belt and direct connection loop attachment hardware - fully adjustable
- Riveted and stitched in heavy-duty nylon thread for extra strength and durability
- Left side fastener has one extra bag for maximum fastener capacity
- Tape holder with cut-out hole on front for quick and easy access (holds up to a 35-ft tape)


51-15089S-M

Fits waist size 33 to 35-in

51-15089S-L

Fits waist size 36 to 39-in

51-15089S-XL

Fits waist size 40 to 44-in

51-15089S-XXL

Fits waist size 45 to 50-in

51-10644R
**PRO DRYWALLER
TOOL BAG**

- Pockets/tool holders: 7
- Front and Side mounted hammer ring holder
- Protective leather sheath for saw pocket
- Main inner pouch includes inner loops for tool organization
- Fits belt size up to 3-in wide


51-15062
**4-POUCH PRO
FASTENER BAG WITH
HOLDERS**

- Pockets/tool holders: 10, (left hand type)
- 8-in deep pouch and holders for angle square, cat's paw loop, 1-in blade square, driver bits, pencils
- Built for easy access with the left hand and are worn on the left side of the body
- Main pouch: 9-in x 8-in; middle pouch: 7-in x 6-in; outer pouch: 5.6-in x 5.6-in; upper pouch: 4.6-in x 4.6-in
- Fits belt size up to 3-in wide


51-15018-DB
**3-POUCH TOOL BAG
WITH TAPE HOLDER**

- Pockets/tool holders: 11 (right hand type)
- 8-in deep pouch, tape holster designed to hold up to a 35-ft tape, and holders for hammer, work knife, lumber crayon, chisel, small level, pencils
- Built for easy access with the right hand and are worn on the right side of the body
- Main pouch: 9-in x 8-in ; Two Outer pouches: 5.2-in x 5.5-in
- Fits belt size up to 3-in wide


51-15060
**3-POUCH PRO
FASTENER BAG WITH
HOLDERS**

- Pockets/tool holders: 9, (right hand type)
- Designed to hold tools and fasteners for framing and carpentry applications
- Holders for angle square, cat's paw loop, 1-in blade square, driver bits, pencils, etc
- Fits belt size up to 3-in wide
- Main pouch: 9-in x 8-in ; Outer pouch: 7-in x 6-in; Upper pouch: 4.6-in x 4.6-in


51-10110-TS
**10-POCKET TOOL AND
NAIL POUCH**

- Pockets/tool holders: 10
- Made of top grain oily-tanned leather
- Left, right side steel swinging hammer ring holders
- Double-gusset front pocket
- Contrasting heavy-duty suede trim and stitching
- Fits belt size up to 3-in wide


51-10113-TSB
**10-POCKET
NAIL & TOOL
BAG**
SIZE | FITS MOST

- Pockets/tool holders: 10
- Made of durable, top-grain, oily-tanned leather
- Snap-lock pouch handle
- Double-gusset front pocket
- Swinging hammer ring holder; steel tape measure clip; web loop for pry bar
- Includes 2-in web belt (one-size-fits-most)



Shown with tools
(not included)



SITEGEAR Pro Leather Bags and Pouches are guaranteed with a two (2) year limited warranty. Visit our website for more details.

51-12035

3-IN RANGER WORK BELT

SIZES | **M L XL XXL**

- Leather 3-in ranger style work belt with 2-in wide tongue
- Constructed with high quality bridle leather with nickel plated steel roller buckle
- Edge stitched for quality, appearance and strength
- Steel rivet reinforcement



51-12101

2-IN TOP GRAIN LEATHER BELT

SIZES | **M L XL XXL**

- Leather 2-in work belt is rugged and comfortable
- Constructed with thick bridle leather
- Heavy-duty steel roller buckle is reinforced with a nickel finish
- Edge stitched for quality, appearance and strength



51-12102

2-IN DOUBLE GROMMET BELT

SIZES | **M L XL**

(Note: The XL for this belt is a one size fits most)

- Double-pronged roller buckle keeps it secure
- 2-in poly web belt is durable and weather-resistant
- Edge stitched with heavy-duty nylon thread
- Ends are finished top grain oil-black leather for comfort and appearance



HOW TO SIZE YOUR WORK BELT

AVAILABLE SIZES (All Belts)

M Medium	L Large	XL X-Large	XXL 2X-Large
Fits 33-in to 35-in	Fits 36-in to 39-in	Fits 40-in to 44-in	Fits 44-in to 52-in

To size your tool belt, place your existing tool belt on an even surface and measure it from the end of the buckle to the most commonly used hole. Select the belt size by the mid point that is closest to your measurement.




If you do not have a current tool belt to measure, you can get an approximate mid range measurement by adding 4-in to your pant waist size.

51-15009

LEATHER WORK SUSPENDERS

- Traditional heavy-duty leather suspenders
- Hand crafted from Bridle leather with large shoulder pads
- Heavy-duty spring clips snap to work belt
- Direct connection loop attachment hardware
- Fully adjustable

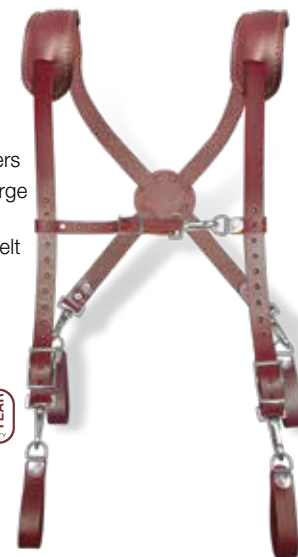

Large leather shoulder pads for comfort and relieves hips and lower back strain



Adjustable chest strap with spring clip keeps shoulder straps securely in place

51-15055

HYBRID SUSPENSION SYSTEM

- Crafted from premium heavy-duty top grain leather and 1680d ballistic/nylon fabric
- D-Ring to easily hang and store entire rig
- Comfortable padded and contoured yoke
- Heavy-duty spring clips snap on and off with leather loop attachments fits up to 3-in belt
- Easy on and off, just release the adjustable chest strap
- Fully adjustable



Extremely comfortable, padded and contoured lined yoke relieves hips and lower back strain



Loop attachment system for up to 3-in belt with spring release clips for easily securing to your tool belt system

51-15024

LARGE PRO UTILITY BAG

- Pockets: 1
- Large pouch designed to hold fasteners for framing and carpentry applications
- Designed with an extra deep bag
- Fits belt size up to 3-in wide
- Main pouch: 10-in x 10.5-in

10-in x 10.5-in
Single pouch



51-15019

COMPACT PRO UTILITY BAG

- Pockets: 1
- Designed to hold fasteners (or use as a tool holder) for framing and carpentry applications
- Compact design is ideal for that third bag in the back
- Fits belt size up to 3-in wide
- Main pouch: 7.75-in x 8-in

7.75-in x 8-in
Single pouch



51-11220

PRO HAMMER HOLDER

- Made of heavy-duty custom-tanned top grain leather
- Steel hammer ring is wedged between two layers of leather and stitched with heavy-duty nylon thread
- Rivets and edge stitching in contrasting heavy-duty nylon thread for durability and maximum life
- Slits to fit up to 3-in (76mm) belt



51-11422P

LEATHER KNEE PADS

- Wide adjustable leather buckle strap with steel buckle
- Made of top grain leather
- Thick water repellent soft felt lining shaped to fit your knees and add extra comfort
- Stitched with heavy-duty nylon thread and riveted for extra strength
- One size fits most



51-11137

HIGH MOUNT TAPE HOLDER

- Made of heavy-duty top grain leather
- Belt worn (up to 3-in belt)
- Made to fit up to 35-ft tape
- Rivets for durability
- Cut-out bottom for easy access to tape



51-11230

TAPE HOLDER

- Made of heavy-duty top grain leather
- Belt worn (up to 3-in belt)
- Made to fit 25-ft to 30-ft tape
- Rivets and edge stitching in contrasting heavy-duty nylon thread for durability and maximum life
- Cut-out bottom for easy access to tape



51-B2617
**PRO FRAMER BALLISTIC
COMBO TOOL BELT**

- 6-piece carpenter's combo is the perfect belt for any tradesman or professional builder's needs
- 28 convenient pockets
- Designed with rugged, lightweight ballistic poly fabric and features double-stitched pockets to survive all wear/tear
- Padded, adjustable suspenders
- Wide, padded belt system with steel roller buckle for comfort
- Removable carry handles for easy carrying
- Weighs 4.1lb (1.86kg)


51-B2617

Fits waist size 29-in to 46-in


51-B4122
**PRO BUCKET TOOL
ORGANIZER**

- Fits most 5 gallon buckets
- Multiple pockets: includes pocket for drill holster and pockets for organizing drill bits
- Made of durable, rugged 600D poly fabric


51-B5680
**ELECTRICIAN'S TOOL
POUCH**

- Three (3) main pockets allow for easy access of your tools and parts
- Steel loop hammer holder, snap hook, and electrical tape web strap
- Flat bottom design helps stabilize pouch when placed on surfaces


51-B1528
**11-IN ELECTRICIAN &
MAINTENANCE
TOOL CARRIER**

- 32 pockets with built-in measuring tape clip
- Flapped external pocket; large open-top center cavity
- Water-resistant, ballistic-quality material, made of reinforced 600D polyester, reinforced rivets
- Durable, molded polypropylene base; non-slip, ergonomic carrying handle with key clip
- Inner dimensions: 9.25-in L x 10.5-in D x 10.25-in H


51-B1535
**18-IN WIDE MOUTH
TOOL BAG**

- Wide mouth top and large interior compartment with HD zipper
- Durable water-resistant, ballistic-quality material, made of reinforced 600D polyester, reinforced rivets
- 19 pockets, slots - includes a zippered pocket
- Durable, molded polypropylene base
- Padded adj. shoulder strap with non-slip handle
- Weighs 3.6lbs (1.63kg)





SitePro

Dave White's SitePro

Lafayette, IN

email: info@dwsitepro.com
website: www.dwsitepro.com



©2025 copyright Dave White's SitePro LLC. All rights reserved. SitePro is a trademark of Dave White's SitePro LLC. SitePro Aperture & D W logo, Gammon Reel, GAMMAGNET, SITEGEAR, and Salamander are registered trademarks of Dave White's SitePro LLC. The David White brand and logo are exclusive trademarks to Dave White's SitePro. All other trademarks are the property of their respective owners. Due to the printing process, the colors of the products printed in this catalog may vary slightly from the actual product. Product images are not to scale. Design and specifications of products are subject to change without notice.